



Superstructure Inspection and Rating

Superstructure Inspection and Rating




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Introduction

- That portion of the bridge above the caps
- Purpose
 - Carry traffic
 - Transfer loads to substructure
- Types for Standard Bridges
 - Timber
 - Concrete
- Component materials
 - Timber
 - Concrete
 - Steel



Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating

Introduction

- Components in Superstructure
 - Bearings
 - Stringers or girders
 - Deck or subdeck
 - Deck wearing surface
 - Curbs or wheelguards
 - Sidewalks
 - Bridgerail
 - Drains
 - Deck joints





Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Standard Girder Bridge

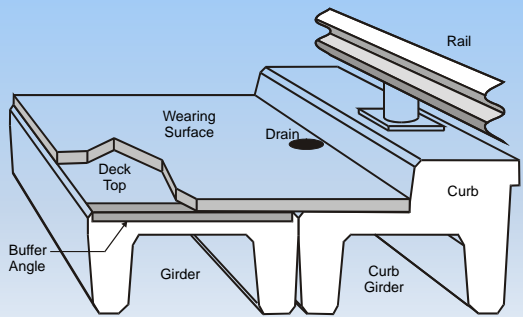



Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating

Timber Bridge

Technical Standards Branch
 Class B Bridge Inspection Course

Superstructure Inspection and Rating

Introduction

- Two form types (included in Supplemental Manual);
 - TT - timber bridges
 - PCS - Standard plain reinforced & pre-stressed concrete girder bridges
- Both are tailored for components in each type of bridge

Technical Standards Branch
 Class B Bridge Inspection Course

Superstructure Inspection and Rating

Material Defects - Timber


- Structural Failure/Degradation
 - due to loads placed on structural members
 - overloads, collisions, poor grain pattern
 - look for cracks, splits, breaks in structural members
 - stringers, timber posts, rails, etc.
- Decay
 - caused by fungi
 - needs moisture, oxygen and conducive temperature
 - pressure treatment prevents growth
 - look for discoloration (white stains coming from cracks, dampness of wood, ring shrinkage at end grain, hollow sounds, change in geometry)
 - look in areas likely to retain moisture
 - bearing or contact areas, buried timber
 - look in areas where treatment is broken/cut
 - bolts, drifts, dowels, cuts, cap ends

Technical Standards Branch
 Class B Bridge Inspection Course

Superstructure Inspection and Rating

Technical Standards Branch
 Class B Bridge Inspection Course

Superstructure Inspection and Rating



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance


Superstructure Inspection and Rating



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating


Timber Defects – Rot



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating

Timber Defects – Cracked Stringer




Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance


Superstructure Inspection and Rating

Material Defects - Timber

- Volume Change
 - caused by cycles of wetting and drying creating stress in wood
 - look for checks, cracks, warps, twists, etc.
- Mechanical Wear
 - caused by abrasion from traffic, snowplows, ice, debris
 - look in area subject to wear/abrasion - deck surface, wheelguard
- Fire
 - easily recognized
 - reduces the load capacity by reducing their effective size
 - removes the pressure treated zone on the exterior exposing the timber to fungal attack





Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Timber Defects – Abrasion





Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating

Timber Defects – Fire Damage






Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Material Defects - Concrete

- Structural Cracks
 - caused by stresses higher than design
 - Flexural – generally not serious unless wide or growing in width
 - Shear - most serious - can lead to failure
 - Anchorage depending on cause
- Shrinkage Cracks
 - caused by rapid drying during hydration
 - usually not serious by themselves but let moisture and salt into the concrete
- Settlement Cracks
 - caused by settlement of the falsework
- Map Cracks
 - chemical reaction of the aggregate and paste
 - usually shallow, from over-finishing
 - can cause scaling



Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating




 Technical Standards Branch
 Class B Bridge Inspection
 Course
 

Superstructure Inspection and Rating




 Technical Standards Branch
 Class B Bridge Inspection
 Course
 

Superstructure Inspection and Rating






 Technical Standards Branch
 Class B Bridge Inspection
 Course
 

Superstructure Inspection and Rating

Material Defects - Concrete

- Corrosion Cracks
 - caused by corrosion of steel in the concrete creating delaminations or spalls.
 - Maintenance or rehab problem
 - varying widths, locations and orientations
- Chipping
 - caused by external mechanical (backhoe)
- Scaling
 - caused by freeze/thaw action
 - related to poor concrete or workmanship
- Spalling
 - caused by corrosion of rebar
- Popouts
 - caused by expansive aggregates
- Punchouts
 - External mechanical that causes tension failure on opposing side


 Technical Standards Branch
 Class B Bridge Inspection
 Course
 

Superstructure Inspection and Rating




Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance


Superstructure Inspection and Rating



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating


SC Girder tops with scaling and section loss



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance


Superstructure Inspection and Rating

SC Girder-severe scaling and section loss



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance


Superstructure Inspection and Rating



Material Defects - Concrete

- Efflorescence
 - white salt stains
 - may be associated with cracks which allow water to get into concrete
- Exudation
 - gel-like substance deposited on surface
 - may be associated with cracks which allow water to get into concrete
- Chemical Attack
 - caused by sulfates in the soil reacting with the concrete
 - increases the volume of the concrete causing cracks


Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance


Superstructure Inspection and Rating




 Technical Standards Branch
 Class B Bridge Inspection
 Course
 

Superstructure Inspection and Rating






 Technical Standards Branch
 Class B Bridge Inspection
 Course
 

Superstructure Inspection and Rating

Material Defects - Steel



- Corrosion
 - caused by the presence of oxygen and moisture
 - reduces section of steel member
 - can significantly reduce the load carrying capacity
 - increases the risk of fatigue failure
 - look in areas prone to retention of moisture or exposure to salt
 - splash areas, under leaky joints or drains, dirt and debris accumulation
- Cracks
 - caused by fatigue, overload or collision
 - initially may be too small to be seen by eye
 - can progress rapidly
 - look in high stress or fatigue susceptible areas
 - welds, holes, notches, collision locations, connections, bearing locations


 Technical Standards Branch
 Class B Bridge Inspection
 Course
 

Superstructure Inspection and Rating

Material Defects - Steel

- Deformation
 - caused by fire, collision, overload or thermal stresses
 - May be local buckling of part of member i.e. web or flange
 - entire member may be bent, twisted or buckled
 - look in high stress areas
 - collision locations, bearing locations


 Technical Standards Branch
 Class B Bridge Inspection
 Course
 

Superstructure Inspection and Rating

Superstructure			
Bridge Component	Last	Now	Explanation of Condition
Special Features			
Special Feature (Type :)			
Special Feature (Type :)			
Wearing Surface/Deck Top Detail Ratings			
	N (N)	1 (N)	2 (N)
Last	0	0	0
Now	0.0	0.0	0.0
Wearing Surface			
(Material Type - ACP)			
(Checkmark - B)			
Special Connection Problem (V2)	No		
Deck Top	N	N	Placed over.
Deck Rideability	7	7	
Deck Joints	No	6	Tar sealed. Seams.
Deck Cracking	No	6	No drains.
Deck Spalls (V3)	No	7	
Deck Surface (Type - Standard)	7	7	
Spalling (Percent Area)	0	0	
Bridge Rail	7	7	Double layer.
Bridge Rail Posts	7	7	
Bridge Rail Posts (Type - GALVANIZED POST STEEL/GALVANIZED POST STEEL)	7	7	
Bridge Rail Posts Coating	7	7	
(Type - GALVANIZED)	7	7	
Skewback	X	X	
Girder Detail Ratings			
	N (count)	1 (count)	2 (count)
Last	0	0	0
Now	0	0	0
G1, G2 and G3 have wide crack with corrosion staining. G4 has two 400 cracks with corrosion staining both near midspan. G5, G6 and G7 have top longitudinal cracks - in bottom of end girders. SE girder member 8 Cracks. Longitudinal cracks with staining staining at connectors. G1 has stain near full length. G2 has stain near full length. G3 has stain near full length.			
No top & SE corners typical cracks - in bottom of end girders. SE girder member 8 Cracks. Longitudinal cracks with staining staining at connectors. G1 has stain near full length. G2 has stain near full length. G3 has stain near full length.			
With cracks of G2 and G3 with staining from connector girders. G1 is cracked at SE and SW over the full span. G5 is cracked at SW over about 50%. G6 and G7 are cracked at SW over about 50%. G8 is cracked at SW over about 50%. G9 is cracked at SW over about 50%.			
(Number Of Girders - 8)			
Span Alignment Problems			
Vertical (V3)	No		
Horizontal (V3)	No		
Superstructure General Rating	2	2	

Technical Standards Branch
Class B Bridge Inspection
Course

Superstructure Inspection and Rating

Superstructure			
Bridge Component	Last	Now	Explanation of Condition
Special Features			
Special Feature (Type :)			
Special Feature (Type :)			
Wearing Surface/Deck Top Detail Ratings			
	N (N)	1 (N)	2 (N)
Last	0	0	0
Now	0.0	0.0	0.0
Wearing Surface			
(Material Type - TREATED TIMBER)			
(Checkmark - B)			
Special Connection Problem (V2)	No		
Deck Top	7	4	Replaced outside planks and approx. 200mm heave at FC.
Deck Rideability	7	4	Minor grade damage. Displaced 100mm at SE and 2 split blocks and 2 rolled blocks at East side.
Deck Joints	No	6	No drains.
Deck Cracking	No	7	
Deck Spalls (V3)	No	7	
Deck Surface (Type - Standard)	7	7	
Spalling (Percent Area)	0	0	
Bridge Rail	7	7	Missing 4 splice bolts at NE and SW.
Bridge Rail Posts	7	7	
Bridge Rail Posts (Type - GALVANIZED POST STEEL/TREATED TIMBER)	7	7	
Bridge Rail Posts Coating	7	7	
(Type - GALVANIZED)	7	7	
Skewback	X	X	
Stringer Detail Ratings			
	N (count)	1 (count)	2 (count)
Last	0	0	0
Now	0	0	0
No 1- B2 is crushed at South and B12 has minor accident damage at South end.			
Span Alignment Problems			
Vertical (V3)	No		
Horizontal (V3)	No		
Superstructure General Rating	5	5	

Technical Standards Branch
Class B Bridge Inspection
Course

Superstructure Inspection and Rating

Special Features

Superstructure			
Bridge Component	Last	Now	Explanation of Condition
Special Features			
Special Feature (Type :)			
Special Feature (Type :)			

- Bridge elements unique to a particular bridge
- Which cannot be rated under another element or area of the form
- May be permanent or temporary
- Lights & WSC station are utilities
- Examples include:
 - strengthening systems, girder clips
 - temporary bents

Technical Standards Branch
Class B Bridge Inspection
Course

Superstructure Inspection and Rating

Special Features


- Record Type(s) – up to 2
- Use Explanation of Condition for additional information
 - description
 - location
 - dimensions
- Check damage or defects common to the materials and type of component
- Provide suitable rating
 - Refer to Section 7.3 in BIM Manual

Technical Standards Branch
Class B Bridge Inspection
Course


Superstructure Inspection and Rating

Special Features





Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating

Wearing Surface


Wearing Surface/Deck Top Detail Ratings				
	N (%)	1 (%)	2 (%)	3 (%)
Leak				
Rise				
Wearing Surface				
(Material Type :)				
(Thickness (mm) :)				
(Plank Width (mm) :)				

- TT forms


Wearing Surface/Deck Top Detail Ratings				
	N (%)	1 (%)	2 (%)	3 (%)
Leak				
Rise				
Wearing Surface				
(Material Type :)				
(Thickness (mm) :)				
(Plank Width (mm) :)				
(Lateral Connection Problem (Y/N))				
Deck Top				

PCS (precast or pre-stressed standard)


- PCS forms



Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating







Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating






Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Wearing Surface

- Bonded or fastened to the bridge deck
- In direct contact with the wheels of the vehicles
- List of types in Section 7.4.2 of the BIM manual
- Loose or frozen gravel is not a wearing surface
- Purpose
 - Protect the deck
 - Provide a smooth riding surface
 - Provide skid resistance




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Wearing Surface

- TT form combines wearing surface and deck top
 - If no wearing surface rating is for deck top only
- Verify the wearing surface material type on the report
 - Type is "NONE" if no wearing surface
- Record or verify the average thickness in mm
- Record the width and thickness of timber planks
- Indicate Y/N whether there is a lateral connection problem between the girders
 - HC - bolted connectors; PA - bolted legs; PE - grout keys; PG - none.





Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Standard Girders with Wear Surface

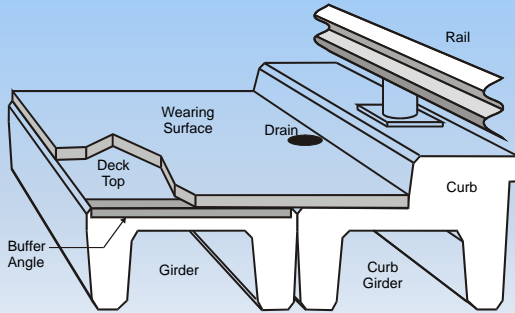




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Wearing Surface - Thickness


- Measure at curb
 - Most standards curbs 300mm high
 - Refer to plans if in doubt
- Take readings at ends and midspan, and average
- Wearing surface may be thicker at centreline than at curb

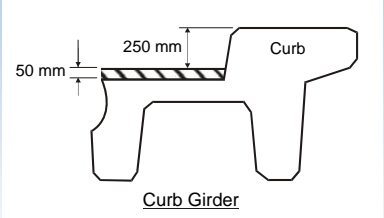

Curb Girder




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Wearing Surface

- Drive over the deck at fastest safe speed
- Observe traffic to assist in rating
- Look for material defects
- For asphalt pavement wearing surfaces look for:
 - cracks (alligator, lane joint, shrinkage and slippage)
 - distortion (ruts, depressions and corrugations)
 - disintegration (potholes and ravelling)
 - segregation
- Check for delaminations in concrete and asphalt wearing surfaces and record amount in percentage of deck area




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Wearing Surface

- If surface is without defects and provides a smooth riding surface with proper skid resistance - rate 9
- Asphalt longitudinal cracks rate 7 or less,
- If speed has to be reduced due to cracks, potholes, etc. - rate 4 or less
- If wearing surface does not cover entire deck and creates a wheel trap - rate 4 or less
- Asphalt leveling rate 4 or less
- Rutting, pot holes or debonding rate 4 or less
- Hazardous rate 2
- Do not rate down due to excessive thickness (100 mm or more)
 - Lower curb rating if height insufficient
 - Request load rating evaluation
 - Recommend reducing thickness




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Wearing Surface

- Record % of surface area with defects and rated 1, 2 or 3 in Detail Rating boxes
- Record % of surface area rated N
- Wearing surface rated are 4 or above, detail ratings are "0"




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Wearing Surface


Superstructure		Last Now Explanation of Condition	
Bridge Component (Primary Span: CH1, 3 Spans, Lengths(m): 8.5-8.5-8.5, A-Ident Number:)			
Special Features			
Special Feature (Type :)			X
Special Feature (Type :)			X
Wearing Surface/Deck Top Detail Ratings			
	N (%)	1 (%)	2 (%) 3 (%)
Last	0	0	0 5
Now	0.0	0.0	5.0 25.0
Wearing Surface (Material Type: ACP - CHIP SEAL COAT)		3	2 ACP Cracking between all girders up to 230mm ACP missing on S span along PG girders. Worst on NBL.
(Thickness(mm) 60)			
Special Connection Problem (Y/N)	No		Not connected
Deck Top	N	N	Paved over
Deck Rideability	4	3	Due to wide gaps up to 230mm wide along girders and missing sections of ACP.
Deck Joints	N	N	Paved over.
Bump (Y/N)	No		




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating







Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating







Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating





Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating


Deck Top

Superstructure		
Bridge Component	Last	Now
Deck Top		

- Deck Top is the "structural" part of the deck
- The surface on which the wearing surface is bonded
- If no wearing surface, the deck top is in direct contact with traffic
- Types:
 - Cast-in-place concrete
 - Precast concrete girders




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Deck Top

- Purpose:
 - Carry traffic
 - Transfer traffic loads to main structural members
 - Provide smooth riding surface
 - Provide skid resistance
- Rated with wearing surface on TT forms




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Deck Top

- Listen for unusual noises and look for deflections under traffic
- Look for material defects
 - Concrete - cracks, scaling, spalling, popouts, abrasion from traffic
 - Timber - missing and loose planks, cracks, splits, rot, wear from traffic
- Look for unfilled lift and connector pockets on precast girders
- Rating of wearing surface does not affect the deck top rating




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Deck Top

- Deck smooth, no defects, rate 9
- Good condition with hairline cracks, rate 7
- If speed reduced due to cracks, potholes, etc., rate 4 or less
- Record % area rated 3, 2, 1 and N in Detail Rating boxes
- Deck top rating 4 or more record 0 in Detailed Rating boxes
- Rate 3 or less for severe scaling/spalling/debonded
- Hazardous conditions rate 2




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Deck Top

Superstructure				
Bridge Component	Last	Now	Explanation of Condition	
<small>(Primary Span 1, 1 Spans, Length(m): 6.1, A-Ident Number:)</small>				
Special Features				
Special Feature (Type:)				X
Special Feature (Type:)				X
Wearing Surface/Deck Top Detail Ratings				
	N (%)	1 (%)	2 (%)	3 (%)
Last	0	0	0	0
Now	20.0	0.0	0.0	0.0
Wearing Surface (Material Type:)	None			5
(Thickness(mm) :)				X
Lateral Connection Problem (Y/N)	No			No connection.
Deck Top				5



Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating





Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating





Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating


Lateral Connection Problem Y/N

Wearing Surface/Deck Top Detail Ratings			
N (%)	1 (%)	2 (%)	3 (%)
Least			
Now			
Wearing Surface (Material Type 1)			
(Displacement Limit)			
Lateral Connection Problem (Y/N)			
Deck Top			


PCS (precast or pre-stressed standard)



Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating





Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating

PE Girder Lateral Connection

Alberta Transportation Technical Standards Branch
Class B Bridge Inspection Course BIM
Bridge Inspection and Maintenance

Superstructure Inspection and Rating

Alberta Transportation Technical Standards Branch
Class B Bridge Inspection Course BIM
Bridge Inspection and Maintenance

Superstructure Inspection and Rating

Deck Rideability

- A measure of the riding comfort at the legal speed
- Influenced by the condition of the wearing surface or deck top and joints (rated separately)
- Drive over at legal speeds and assess ride quality
- Listen for unusual noise from traffic
- Observe traffic for signs of poor rideability such as slowing down or bouncing
- Smooth, no speed reduction rate 7 or more
- If speed has to be reduced due to cracks, potholes, etc. - rate 4 or less
- Slipperiness reduces rating

Alberta Transportation Technical Standards Branch
Class B Bridge Inspection Course BIM
Bridge Inspection and Maintenance

Superstructure Inspection and Rating


Alberta Transportation Technical Standards Branch
Class B Bridge Inspection Course BIM
Bridge Inspection and Maintenance

Superstructure Inspection and Rating


Deck Joints

Superstructure			
Bridge Component	Last	Now	Explanation of Condition
Deck Joints			
Bump (Y/N)			

- Purpose
 - Provide a structural termination of individual spans
 - Can be designed to prevent water and salt from leaking down onto substructure
 - Protects ends of precast girders (buffer angles)
 - Can be designed to span gap between spans
 - Provide a smooth transition (reduces bumps)
- On standard bridge all joints are considered fixed.
- Not applicable to standard TT bridges




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Deck Joints

- Standard Bridge Types
 - Buffer angles - steel angles cast into top edge at ends of girder
 - Compression seal - a compressible seal held in place by steel angles
 - Strip seal installed at piers of overlays
 - Others - caulked sawcuts, asphaltic plug joint (Koch or Thorma-joint)
- Asphalt fiber board alone is not a joint – rate X
- Unprotected girder ends is not a joint – rate X




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Deck Joints

- Observe traffic crossing over joints
 - Listen for unusual noises
 - Watch for movement
- Look for:
 - Vertical alignment
 - Corrosion
 - Deteriorating concrete around anchorages
 - Damage from snow plows
- Indicate whether or not a significant bump by Yes or No
 - If “Yes”, explain location and cause




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Deck Joints


- Buffer angles should not be rated down because they leak
- Damage from leakage rated in substructure
- Slightly less than adequate but no maintenance required – rate 4 (missing section of buffer angle)
- Joints requiring repair – rate 3
- Joints which are a hazard to traffic - rate 2 or less
- If joint is not visible:
 - Rate “X” if it is known that no joint exists
 - Rate “N” otherwise
 - Provide explanation



Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating







Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating





Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating


Deck Drainage

Bridge Component	Superstructure		Explanation of Condition
	Last	Now	
Deck Drainage			
Drains Clogged (Y/N)			

- Ability of the deck to drain and properly dispose of water from its surface
- Not applicable to bridges with timber decks
- Drainage system includes gutters, inlet boxes, pipes and catch basins




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Deck Drainage

- Poor drainage
 - Common cause of deck deterioration
 - May be hazardous due to hydroplaning or icing
 - Caused by inadequate design, construction or maintenance practices (grade, crown, debris, etc)
 - May affect other superstructure components, substructure, headslopes and sideslopes



Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating






Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Deck Drainage

- Indicate whether or not the drains are plugged by **Yes** or **No**
 - If no drains, note in Explanation of Condition
- Check entire drainage system to determine if water is being directed off the deck in a proper manner
- If there are any deficiencies in the drainage system or significant deterioration of any components - rate 4 or less
- If erosion is being caused on the headslopes or sideslopes by deck drainage - rate 4 or less
- If water is being allowed to pond on the deck and create a hazard for traffic - rate 2 or less
- not a factor on timber decks therefore rate X



Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating


Curbs / Medians

Superstructure			
Bridge Component	Last	Now	Explanation of Condition
Curb/Median			
Scaling (Percent Area)			

- Raised surface at the edge of the roadway
- Purpose
 - Guide or redirect traffic
 - Divide the bridge according to travel direction
 - Anchor railing posts
- Applies to concrete only - timber or steel called wheelguards




Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating


Curbs / Medians

- Curb consists of:
 - the vertical or sloped face along the edge of the roadway
 - the raised horizontal surface
 - the fascia or outside surface down to the deck or girder level




Curb

Curb Girder




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Curbs / Medians

- Look for:
 - Scaling
 - Other material defects - cracks, spalls
 - Snowplow damage along inside faces
 - Accident damage
 - Holes exposing the voids
 - Water damage in voids and freezing
 - Whether curb lift hook pockets are filled
- Estimate the amount of scaling as a percentage of the total area
 - Record the percentage in the appropriate field
 - Describe the extent and location in the *Explanation of Condition*
 - Scaling is not normally a problem on gravel roads unless using calcium chloride for dust control




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Curbs / Medians

- Note any loss of height due to roadway paving or accumulation of dirt or gravel
- Rate according to condition and ability to perform as designed
 - Condition of concrete
 - Ability to withstand and redirect traffic
 - Ability to contain railing anchors in the event of a collision
- Curbs with holes rate 4 or less
- Severe scaling (>25 mm deep) rate 4 or less
- Spalling or broken concrete affecting post anchorage rate 3 or less




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating





Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating







Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating





Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating






Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating




SC Girder Deterioration at Plinth

- Curb is rated "X" for this example
- Plinth deterioration is rated under BR post section on form (rated 3).



Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating


Wheelguard

Superstructure			
Bridge Component	Last	Now	Explanation of Condition
Wheel Guards			
(Curb Type :)			
(Type :)			
(Curb Height (mm) :)			
(Width (mm) :)			

- Curbs made out of timber or steel
- Found on timber decks
- Verify type, height and width
- Record in nominal dimensions (typ. size is 100 x 300 or 150 x 300 but some variations)
- Revise as in inventory area on form
- Add this information if missing
- Record wheelguard block dimensions in comments area if needed




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Wheelguard

- Look for:
 - Poor anchorage
 - Material defects
 - Missing or loose bolts
 - Poor connections
 - Mis-alignment
 - Collision damage
 - Snowplow damage
 - Missing sections
- Note any loss of height due to roadway paving or accumulation of dirt or gravel
- Rate according to condition and ability to perform as designed
- Minor splits/cracks rate 5
- Missing/broken sections, blocks, anchors rate 4 or less



Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating







Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating





Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating


Sidewalk

Superstructure			
Bridge Component	Last	Now	Explanation of Condition
Sidewalk			

- Applicable to PCS bridges
- Designed to accommodate pedestrian traffic
- Not normally part of the load carrying system of the bridge
- If part of the load carrying system, rating & inspection procedures are similar to "Deck Top" and/or "Girder"



Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating


Sidewalk

Look for:


- Smoothness, adequate traction and debris
- Accessibility for pedestrians to the sidewalk at both ends of the bridge
- Material defects
- Condition of structural members and connections
- Condition of railings (rate under bridge rail)
- Hazards to pedestrian traffic (tripping, slipping, holes, loose boards, etc. rate 2 or less)
- Rate according to condition and ability to perform as designed
- Rails systems rated with Bridgerails
- Some defects may be less serious on a sidewalk than on the bridge




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating





Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating


Bridge Rail / Posts

Superstructure			
Bridge Component	Last	Now	Explanation of Condition
Bridge Rail (Type:)			
Bridge Rail Posts (Type:)			
Bridge Rail/Posts Coating (Type:)			

- Considered to be safety features
- Do not contribute to the strength or load carrying capacity of the bridge
- Refer to Section 7.11.2 in the manual for a list of railing and post types
- Verify railing and post types – correct/add in inventory area
- Record coating type on rails and posts
- Record number of layers of flexbeam in comments




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Bridge Rail / Posts

- Look for:
 - Material defects
 - Collision damage
 - Horizontal and vertical mis-alignment
 - Loose connections
 - Missing nuts or bolts
 - Inadequate thread engaged on post anchor nuts
 - Broken or spalled post anchors
 - Correct lap direction of flexbeam
 - lapped in direction of traffic
- Includes pedestrian rails found on sidewalks




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Bridge Rail / Posts

- Rate according to condition and not the standard of the rail, posts or coating
 - timber rail is substandard but can be rated 9 if in new condition
 - timber posts with wrong orientation
- Rating for rail and posts does not include the condition of the coating – rated separately unless severe corrosion
- If coating on rail and posts is different then record and rate rail coating. Note post coating type and condition in Comment area
- Railing with minor collision damage but still functional and has good connections rate 5
- Timber with signs of rot rate 4 or less
- Rail connections with missing bolts, improper laps nuts rate 4 or less
- Railing with missing sections - rate 2 or less




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Bridge Rail / Posts

- Post anchor bolts that are engaged with nuts (at least flush nut) rate 5 or more
- Post anchor bolts with insufficient thread rate 4 or less
- Post anchors that are broken or missing anchor nuts and bolts rate 3 or less



Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating





Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating






Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating

Missing BR Section – Rated 2



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating


Typ. TT wheelguard, TT posts, galv. rail



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating


Deterioration Affecting Post Anchorage – SC Girders



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating

Typ. TT wheelguard, TT posts, galv. rail




Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating


Subdeck

Superstructure		
Bridge Component	Last	Now
Explanation of Condition		
Sub Deck/Deck Underside		
(Material Type :)		
(Plank Thickness (mm) :)		
(Plank Width (mm) :)		
Defects (Percent Area)		

- Applies only to Standard timber bridges
- The “structural” part of the deck
- Strip deck usually installed on top to protect
- If no wearing surface, subdeck is in contact with traffic
- Consists of timber planks nailed to stringers
- Often only visible to inspect at underside and ends
- Verify type and revise or add as needed
 - Record in Inventory area of form.
- Record nominal width and thickness – normally 100 x 300mm




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Subdeck/Underside

- Look for:
 - Material defects
 - Loose or broken planks
 - Deflection under traffic
- Estimate the percentage of the area which has defects and record value
 - Decay, staining, split or broken planks
- Minor stains/cracks (concrete) rate 5
- Spalls or severe scaling rate 4
- Rot/Decay in timber rate 4 or less
- Note location in Manual – Section 7.21




Technical Standards Branch
Class B Bridge Inspection
Course






Superstructure Inspection and Rating







Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating





Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Stringers


Superstructure				
Bridge Component				Explanation of Condition
	Last	Now		

(No. of Stringers :)				
Stringer Detail Ratings				
	N (count)	1 (count)	2 (count)	3 (count)
Last				
Now				
Stringers				
(Type :)				
(Width (mm) :)				
(Depth (mm) :)				
(Spacing (mm) :)				

- Longitudinal beams resting on the caps and supporting the deck
- The main load carrying members of the superstructure
- Verify number per span or add if missing
- Verify type, size (width and depth), and spacing in nominal dimensions and record in Inventory area of form




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Stringers

- Purpose:**
 - Support the deck
 - Transfer loads to substructure
 - Critical load carrying members
- Repaired or “sistered” stringers count as one stringer (repair must be with equivalent size stringer)
- Record if stringers are notched including location



Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating

Stringer and Girder Numbering

7.13.2. Stringer/Girder Numbering
Girders or stringers are numbered west to east or south to north (see Figure 7.10).

Figure 7.10 - Stringer/Girder Numbering

Technical Standards Branch
Class B Bridge Inspection
Course

Superstructure Inspection and Rating

Stringers

- Look for:
 - Material defects
 - decay, cracks, checks, fire damage, sags, twists
 - Broken or missing stringers
 - Adequate bearing, proper connections and any splitting, crushing or decay in bearing area
 - Collision damage or abrasion from ice or drift
 - Notches at ends of girders

Technical Standards Branch
Class B Bridge Inspection
Course

Superstructure Inspection and Rating

Stringers

- Stringers with notches at the ends - rate 7 or less and note in comments area
- Cracked or broken stringers which have been repaired with additional stringer(s) of equal size may be rated 5 or more
- Stringers with less than 75mm bearing rate 4 or less
- Stringers that are bowed or twisted significantly - rate 4 or less
- Cracked stringers rate 3 or less
- Record number of stringers rated N, 1, 2 & 3 in Detailed Rating boxes
- If all stringers are rated 4 or more, Detail Ratings are recorded as "0"

Technical Standards Branch
Class B Bridge Inspection
Course

Superstructure Inspection and Rating

Technical Standards Branch
Class B Bridge Inspection
Course

Superstructure Inspection and Rating



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating




Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating

Girders

Superstructure	
Bridge Component	Last Now Explanation of Condition

Girder Detail Ratings				
	N (count)	1 (count)	2 (count)	3 (count)
Last				
Now				

Girders
 Last Complete Inspection Date
 Cracking (Y/N)
 Spalling (Percent Area)
 Lift or Connector Pocket
 Grouted (Y/N)
 (Number Of Girders -)

- Applies only to concrete girder bridges
- Longitudinal beams resting on the caps
- The main load carrying members of the superstructure
- The deck is integral with the girder
- Detail ratings only on PCS
- Last Complete Inspection Date

Technical Standards Branch
Class B Bridge Inspection Course

Superstructure Inspection and Rating

Girders

- Purpose:
 - Support the deck
 - Transfer loads to substructure
- Two types in Standard bridges
 - Channel Girders - conventionally reinforced channel girders
 - Standard Prestressed – short girders with pre-tensioned reinforcement

Refer to BIM Reference Manual for types of girders

Technical Standards Branch
Class B Bridge Inspection Course

Superstructure Inspection and Rating

Table 1.1 from BIM Manual

FORM TYPE	DESCRIPTION	SPAN TYPE
TR	Through Trusses	TN
PT	Pony Truss	PT
RB	Robbed Beams	RB RC
RG	Reinforced Plain Girders	RG
WG	Welded Girders	WG
SG	Steel Girder Frames	SG
SS	Other Trusses & Arches	SS SSB SSA SSS SSP SSC
DT	Deck Trusses	DT
TT	All Truss Bridges	TT
PCS	Standard Prestressed Bridges	PH HC VH PG GR PE PA PS IM SCD TGD HGD JV PS PS VS SM SNC SC SCC SNO VSD BCM BL BLC
PSR	Regular Prestress Bridge	CP PHO CM LF FM RM PJ NJ CRT DBC DSC DCD DAD
CON	All Cast in Place Concrete Bridge Concrete Tee Girder Bridges Concrete Flat Slab Bridges	CA CB CF CV CK CC CXP CT CS
CU1	Single Culverts	RF SF FF SFH CF SF AP BPH
CU2	Multiple Culverts	RFB CFA CFE CFE
CU3	Culverts extended with different material and/or size	PCR RPA RPE RPH RPH SCL SCS SSP SPP SPS SSA SPS
SN	Sign Structures	Z
TTT	Through Trusses with Timber Approaches	
TTPCS	Through Trusses with Standard Prestressed Approaches	
TTRPS	Through Trusses with Regular Prestressed Approaches	
THSG	Through Trusses with Steel Girder Approaches	
TWFT	Through Trusses with Pony Truss Approaches	
PTTT	Pony Trusses with Timber Approaches	
PTPCS	Pony Trusses with Standard Prestressed Approaches	
SGTT	Steel Beams with Timber Approaches	
SGPCS	Steel Beams with Standard Prestressed Approaches	
PSRPS	Regular Prestress with Standard Prestressed Approaches	
SSSG	Special Steel with Standard Prestressed Approaches	
DTSG	Deck Truss with Steel Girder Approaches	

Table 1.1 - BIM Report Index

Technical Standards Branch
Class B Bridge Inspection Course

Superstructure Inspection and Rating

Girders


- Cracks are often the first visible sign of distress or failure
- Types of cracks:
 - Vertical hairline cracks on precast channel girders - common not serious
 - Vertical cracks in the tension zone – flexure – usually not serious unless wide
 - Diagonal cracks near the supports - shear or combination of shear and flexure, can be serious
 - Longitudinal cracks in bottom of legs in precast girders - corrosion of rebar
 - Wide longitudinal cracks in bottom of legs with corrosion may lead to spalling
 - Longitudinal cracks in ends of prestressed girders - stresses from pre-tensioned reinforcement
 - Wide longitudinal cracks with corrosion in girder undersides of prestressed girders may be from strands

Technical Standards Branch
Class B Bridge Inspection Course


Superstructure Inspection and Rating

Girders

- Look for:
 - Cracks
 - Spalling on bottom of legs
 - Other defects - scaling, staining, etc.
 - Damaged connectors - deteriorating grout, loose or broken bolts, corrosion on bolts or connector channels
 - Spalls at dowel locations
 - Collision damage or abrasion from ice or drift
 - Punchouts in deck
- Look for excessive vibrations or deflections under traffic
 - Observe whether girders with lateral connections deflect independently




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Girders

- Indicate cracking by **Yes** or **No**
 - Applies to all types except shrinkage and hairline or narrow flexural cracks
 - If Yes explain - location, type, size
 - Mark and date cracks
- Record the percentage of spalling on the bottom of the legs
 - Record 0% if none
 - Explain if any
- Indicate Lift or Connector Pockets Grouted
 - **Yes** or **No**
 - If Yes explain
- Verify total number of girders or record number per span if blank




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Girder Rating Guide

- Rating guidelines are provided in Table 7.2 for standard reinforced channel girder
- Provided in Tables 7.3, 7.4 and 7.7 for prestressed girders
- Ratings given are *maximums*
 - Decrease as needed
 - Reflect condition and functionality
- If curb girder *only* affected, can increase ratings by one
- Provide girder count for N, 1, 2 & 3 ratings
- If girder ratings are 4 or above detail ratings are "0"



Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating


Rating Guide for Standard Reinforced Concrete Channel Girders

Rating	Spalling or Longitudinal Cracks on Legs	Shear Cracks (not greater than 60° from horiz.)	Other Defects
No effect			• Narrow flexural cracks.
6			• End diaphragm spall. • Narrow map cracks.
5	• Medium crack within anchorage zone with sound concrete (must be accessible and confirmed by inspector) • Wide crack or spall outside anchorage zone	• Narrow (reduce by one if wide longitudinal crack or spall within anchorage zone)	• Top slab transverse crack
4	• Medium or wide crack within anchorage zone with unsound concrete or concrete soundness not confirmed by inspector • Wide crack within anchorage zone with sound concrete (must be accessible and confirmed by inspector) • Moderate loss of section on main bars or stirrup bends (up to 10%)		• Medium or wide map cracking or any map cracking with staining • Medium flexural cracks • Small punchouts, 150 mm or less in diameter • Narrow concrete grout key cracks
3	• Wide crack within anchorage zone with unsound concrete or concrete soundness not confirmed by inspector • Spall within anchorage zone with top half of main reinforcing steel embedded in sound concrete	• Medium (reduce by one if wide longitudinal crack or spall within anchorage zone)	• Other punchouts • Medium or wide concrete grout key cracks • Failed girder connections
2	• Spall within anchorage zone with unsound concrete extending above top half of main reinforcing steel • Severe loss of section on main bars or stirrup bends (greater than 20%)	• Wide or growing (reduce by one if wide longitudinal crack or spall within anchorage zone)	• Wide flexural cracks • End diaphragm spall extending into legs
1			

Table 7.2 - Rating Guide - Standard Reinforced Concrete Girders



Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating

Rating Guide for Standard Reinforced Concrete Channel Girders

Table 7.2 - Rating Guide - Standard Reinforced Concrete Girders


Notes:

- Reduce as needed to reflect condition and functionality of structure.
- Longitudinal crack rating is eligible for a one rating point increase if girder type has hooked or cranked longitudinal bars (Type PA and PG girders only) OR longitudinal cracking or spalling is limited to a single leg on the girder. These rating point increases are not cumulative.
- If defects listed are limited to curb girder only the ratings can be raised by one to reflect the lower live load carrying function of this unit.


- Reduce rating by one for punchouts if punchout occurs at lift hook pockets, connector pockets, or at midspan of girder.
- Anchorage zone defined as 1.2 m from the end of the girder for all spans less than 10 m.
- Anchorage zone defined as 2.0 m from the end of the girder for all spans 10 m or longer.

Cracks Widths:

- Hairline less than 0.1 mm
- Narrow 0.1 mm to less than 0.3 mm
- Medium 0.3 mm to less than 1.0 mm
- Wide equal to or greater than 1.0 mm




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Precast Channel Girder Rating Guide

- Crack widths:
 - Hairline < 0.1mm
 - Narrow ≥ 0.1mm and < 0.3mm
 - Medium ≥ 0.3mm and < 1.0mm
 - Wide ≥ 1.0mm
- Use a crack gauge to measure widths
- Anchor Zone is 1.2m when girder less than 10m & 2.0 when 10m or more (channel girders only)
- Increase longitudinal crack rating by 1 for PA and PG girders OR if only one leg (HC girders). Increase is not cumulative
- Reduce by 1 if punchout at pockets, connectors, or mid-span.
- Defect in curb girder only increase by 1



Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating





Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating





Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating




Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating




Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating




Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance


Superstructure Inspection and Rating




Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating





Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating






Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Rating Pre-stressed Girders

- Refer to Sections 7.14 to 7.15.2.7 for general information.
- Refer to Section 7.15.4 for specific information.
- Suggest using “3-strike” rule when determining ratings for pre-stressed girders.
 1. Start with Table 7.7 – Exception List for common std. girder types (VS, SM, SC, SL).
 - Note that crack width must be narrow – reduce by 1 if corrosion staining is present.
 - If defect in field matches description in Table 7.7 then rate accordingly.
 2. Refer to Table 7.4 – Exception List for ALL Pre-stressed Girders.
 - If defect in field matches description in Table 7.4 then rate accordingly.
 3. Refer to Table 7.3–strike 3 – rate accordingly



Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Rating Guide for Prestressed Girders – Table 7.7


Girder Type: VS, SM, SC, RD, RM, PM, VM, SL

Crack	Rating	Description
1.	5	Diagonal crack on bottom of girder, not longer than 0.5 m. Crack length must be continuous and not intermittent or staggered. Crack lengths to be measured from the face of the pier cap or abutment seat and along the length of the crack (with no signs of corrosion staining).
	3	Diagonal crack on bottom of girder, not longer than 0.5 m. Crack length must be continuous and not intermittent or staggered. Crack lengths to be measured from the face of the pier cap or abutment seat and along the length of the crack (with signs of corrosion staining).
2.	5	Longitudinal crack on girder underside.
3.	5	Longitudinal crack at lower curb fascia.
4.	5	Crack in poured connection at fascia over piers (RM, RD, SMC, SCC, SCM, SLC).

Table 7.7 - Exception List- Girder Type: VS, SM, SC, RD, RM, PM, VM, SL



Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating


Rating Guide for Prestressed Girders – Table 7.4

Exception List - All Prestressed Girders

Crack	Rating	Description
1	6	<ul style="list-style-type: none"> • Narrow map cracks
	4	<ul style="list-style-type: none"> • Medium, wide or any map cracking with staining
2	3	<ul style="list-style-type: none"> • Vertical crack 50 to 100 mm from end of girders with or without signs of corrosion stains




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Rating Guide for Prestressed Concrete Girders – Table 7.3

Rating	Defects
4	<ul style="list-style-type: none"> • Hairline cracks with no staining except as noted below.
3	<ul style="list-style-type: none"> • All other cracks except as noted below. • Corrosion stains originating from prestressed strands.
2	<ul style="list-style-type: none"> • Cracks with signs of corrosion in webs or bottoms of boxes or flanges except as noted below. • Any cracks which are growing.
1	<ul style="list-style-type: none"> • Any cracks which are opening or closing under traffic or with slippage along the cracks.





Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Typical Diagonal Crack







Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Longitudinal Crack – No Corrosion






Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance


Superstructure Inspection and Rating



Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance

Superstructure Inspection and Rating

Typical Corrosion Spots




Alberta Transportation Technical Standards Branch Class B Bridge Inspection Course BIM Bridge Inspection and Maintenance


Superstructure Inspection and Rating

BIM Bulletin 6 (DRAFT) – SC Girder Deterioration

- AT First learned of problem in 2012
- 6 SC girder bridges showing signs of accelerated freeze thaw deterioration on exterior girders.
- Investigation revealed deterioration due to substandard aggregates in concrete mixes used in girders fabricated 2003-2007
- 88 SC girder bridges built in this time frame
- 36 of 88 bridges now showing deterioration with various degrees of severity.
- 16 - significant premature deterioration
- 20 - deterioration may soon become severe
- Severe deterioration typically on exteriors especially if exposed to direct sunlight but interior girders are also affected



Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

BIM Bulletin 6 (DRAFT) – SC Girder Deterioration


Issues include:

- > failure of the bridgerail where it anchors into exterior girder,
- > structural capacity of the exterior girders due to loss of concrete and reinforcing steel embedment,
- > signs that damage to the tops of girders may soon become a concern for sites with no wearing surface.

Guidelines for BIM Ratings and Maintenance Recommendations for SC girder bridges showing signs of premature freeze thaw deterioration are presented in the Bulletin.



Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating


Bulletin 6 (DRAFT) – SC Girder Deterioration Ratings

BIM Rating Guidelines


The current guidelines for rating prestressed concrete girders do not address the freeze thaw issues that are occurring with the SC girder bridges. The following recommendations are intended to supplement the BIM Inspection Manual guidelines to address specific concerns with these SC girder bridges and to assist with using the Management Strategy Flow Chart presented in the following section. BIM rating guidelines are presented in Table 1 below. The one rating point increase for curb girders described in Section 7.15.2.7 of the BIM Inspection Manual shall not be applied to SC girders showing signs of freeze thaw damage. Example photographs are provided in the Appendix.

Table 1: Level 1 BIM Rating for SC Girders


Element	Rating	Defects
Interior and exterior girders	4	Aggregate popouts, minor scaling and other signs of freeze thaw damage with no visible signs of concrete section loss.
	3	Section loss along the top and bottom corners of girders. Section loss at girder end face. Extensive scaling of girder surfaces.
	2	Exposed steel stirrups. Exposed prestressing strands. Significant section loss on all surfaces.
Bridgerail posts	3	Section loss at the top corner of the exterior girder but not yet to the edge of the bridgerail post base plate. Concrete section loss of the bridgerail post plinth.
	2	Concrete girder section loss extends up to or underneath the edge of the bridgerail post base plate.



Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating




Bulletin 6 (DRAFT) – SC Girder Deterioration

Extensive scaling exterior girder surfaces , section loss along top and bottom corners. No exposed stirrups or prestressing strand. Section loss of BR post plinth. Girder rated 3. BR posts rated 3.



Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating



Bulletin 6 (DRAFT) – SC Girder Deterioration


Section loss along top and bottom corners of exterior girder. Girder rated 3. Bridgerail posts rated 3.



Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating




Bulletin 6 (DRAFT) – SC Girder Deterioration

Section loss along top corners and top surfaces of interior girders. Interior girders rated 3.



Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating



Bulletin 6 (DRAFT) – SC Girder Deterioration


Significant section loss all surfaces extending beneath BR post baseplate. Exposed stirrups. Exterior girder rated 2. BR post rated 2.



Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating




Bulletin 6 (DRAFT) – SC Girder Deterioration

Scaling of exterior face, section loss on top and bottom corners extending beneath the BR post bases. No exposed strands or stirrups. Exterior girder rated 3. BR posts rated 2.



Technical Standards Branch
Class B Bridge Inspection
Course



Superstructure Inspection and Rating




Bulletin 6 (DRAFT) – SC Girder Deterioration

Section loss top corner of exterior that does not extend to the edge of the BR post base plate. Aggregate popouts on exterior face. Concrete section loss of BR plinth. Girder rated 3. Bridgerail post rated 3.



Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating


Span Alignment Problems

Bridge Component	Superstructure		Explanation of Condition
	Last	Now	
Span Alignment Problems			
Vertical (Y/N)			
Horizontal (Y/N)			

- Applies only to
 - the vertical and horizontal alignment of the superstructure
- No rating is required
- Mis-alignments may indicate distress in the superstructure and/or substructure




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating


Span Alignment Problems

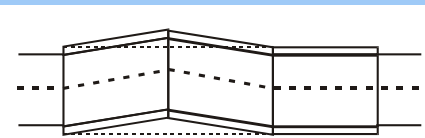


Horizontal Misalignment



Vertical Misalignment




Technical Standards Branch
Class B Bridge Inspection
Course




Superstructure Inspection and Rating

Span Alignment Problems

- Look along edges of girders, curbs, railing for signs of sags, bows, movement, buckling, twisting, etc.
- Look for vertical mis-alignment and uneven gaps at deck joints
- Indicate whether there is a vertical and horizontal alignment problem by Yes or No
- Provide an explanation of the location, type, possible cause and seriousness



Technical Standards Branch
Class B Bridge Inspection
Course



General Rating

- Governed by
 - Structural load carrying members
 - Subdeck or deck underside
 - Stringers
 - Girders
- Span alignment problem if related to serious structural
- Hazardous conditions such as missing rail, conditions potentially harmful to motorists



Technical Standards Branch
Class B Bridge Inspection
Course



Questions??



Technical Standards Branch
Class B Bridge Inspection
Course

