

ALBERTA TRANSPORTATION AND
ECONOMIC CORRIDORS GRMP
NORTH CENTRAL (ATHABASCA AND FORT
McMURRAY DISTRICTS)
INSTRUMENTATION MONITORING- SPRING 2024



Site Number	Location	Name	Hwy	km
NC089	HWY 63:12	Beacon Hill Backslope Slide	63:12	Km 8.7
Legal Description: 3-10-89-9 W4		UTM Co-ordinates		
		12U E 478503	N	6284103

Current Monitoring:	11-June-2024	Previous Monitoring	30-May-2023
Instruments Read By:	Mr. Niraj Regmi, G.I.T and Mr. Nixson Mationg, of Thurber		

Instruments Read During This Site Visit			
Slope Inclinerometers (SIs): SI17-2 and SI17-7	Pneumatic Piezometers (PN): PN17-1A, PN17 1B, PN17-2A, PN17-2B, PN17-3A, PN17-3B, PN17-4, PN17-5A, PN17-5B, PN17-6A, PN17-6B, PN17-7A, PN17-7B, and PN17-7C	Vibration Wire Piezometers (VW): N/A	Standpipe Piezometers (SP): N/A
Load Cell (LC): N/A	Strain Gauges: N/A	SAs: N/A	Others:

Readout Equipment Used			
Slope Inclinerometers: RST Digital Inclinerometer probe with a 2 ft. wheelbase and a RST Pocket PC readout	Pneumatic Piezometers: RST C108 pneumatic piezometer reader	Vibration Wire Piezometers:	Standpipe Piezometers:
Load Cell:	Strain Gauges:	SAs:	Others:

Notes:
<ul style="list-style-type: none"> - A site plan showing instrument locations is included in Appendix A. - SIs plots with A and B directions are presented in Appendix A and summarized in Table NC089-1, attached. Where movement was recorded, the resultant (plot X) and the rate of movement plot are also included. - The Pneumatic piezometer plot is included in Appendix A. - Pneumatic piezometer readings are summarized in Table NC089-2, attached.

Discussion	
Zones of New Movement:	None
Interpretation of Monitoring Results:	SI17-2 showed a rate of movement of 0.8 mm/yr movement over 1.8 m to 3.6 m depth, a rate of movement of 0.3 mm/yr over 4.8 m to 7.3 m depth, and a rate of movement of 0.3 mm/yr over 16.4 to 17.6 m of depth. The rate of movement increased in SI17-2 by 1.4 mm/yr over 1.8 m to 3.6 m depth since the spring of 2023 reading event. SI17-7 showed a rate of movement of 0.7 mm/yr over 1.6 m to 3.4 m depth and a rate of movement of 0.3 mm/yr over 22.9 m to 24.1 m depth.

	<p>Pneumatic piezometers PN17-1A, PN17-1B, PN17-2A, PN17-4, PN17-6A, PN17-7A and PN17-7C showed increases in groundwater levels of 0.47 m, 0.17 m, 0.10 m, 1.51 m, 0.12 m, 0.47 m, and 0.55 m, respectively, since the spring of 2023. PN17-1A and PN17-4 showed a groundwater level of 5.07 m and 3.04 m below ground surface, respectively, which is the highest recorded reading in each of the instruments since initialization.</p> <p>Pneumatic piezometers PN17-2B, PN17-3A, PN17-3B, PN17-5A, PN17-5B, PN17-6B, and PN17-7B showed decreases in groundwater of 0.05 m, 0.07 m, 0.07 m, 0.04 m, 0.15 m, 0.01 m, and 0.04 m, respectively since the spring of 2023.</p>
Future Work:	The instruments should be read again in the spring of 2025.
Instrumentation Repairs:	No instrument repairs are required at this time.
Additional Comments:	

Attachments:	<ul style="list-style-type: none"> • Table NC089-1 Spring 2024 – HWY 63:12 Beacon Hill Backslope Slide (Km 8.7), Slope Incliner Instrumentation Reading Summary • Table NC089-2 Spring 2024 – HWY 63:12 Beacon Hill Backslope Slide (Km 8.7), Pneumatic Piezometer Instrumentation Reading Summary • Statement of Limitations and Conditions • APPENDIX A – NC089-1 SPRING 2024 <ul style="list-style-type: none"> ○ Field Inspector’s report ○ Site Plan Showing Approximate Instrument Locations (Drawing No. 32122-NC089) ○ SI Reading Plots ○ Figure NC089-1 (Piezometric Depths)
---------------------	--

We trust this report meets your requirements at present. If you have any questions, please contact the undersigned at your convenience.

Yours very truly,
Thurber Engineering Ltd.
Tarek Abdelaziz, Ph.D., P. Eng.
Partner | Senior Geotechnical Engineer

Lucas Green, P.Eng.
Geotechnical Engineer



Table NC089-1: Spring 2024 – Hwy 63:12 Beacon Hill Backslope Slide (Km 8.7) Slope Inclinometer Instrumentation Reading Summary

Date Monitored: June 11, 2024

INSTRUMENT #	DATE INITIALIZED	TOTAL CUMULATIVE RESULTANT MOVEMENT AND DEPTH OF MOVEMENT TO DATE (mm)	MAXIMUM RATE OF MOVEMENT (mm/yr)	CURRENT STATUS OF SI	DATE OF PREVIOUS READING	INCREMENTAL MOVEMENT SINCE PREVIOUS READING (mm)	CURRENT RATE OF MOVEMENT (mm/yr)	CHANGE IN RATE OF MOVEMENT SINCE PREVIOUS READING (mm/yr)
SI17-2	September 18, 2017	36.0 mm over 1.8 to 3.6 m depth in 54° direction	58.9 on September 25, 2020	Operational	May 30, 2023	0.8	0.8	1.4
		7.1 mm over 4.8 to 7.3 m of depth in 81° direction	5.8 on September 25, 2020			0.3	0.3	0.3
		2.5 mm over 16.4 to 17.6 m depth in 54° direction	3.6 on October 18, 2017			0.3	0.3	0
SI17-3	September 18, 2017	94.7 mm over 1.4 to 3.8 m depth in 20° direction	183.1 on September 25, 2020	Blocked at 1.2 m	September 25, 2020	N/A	N/A	N/A
SI17-4	September 18, 2017	1.0 mm over 2.0 to 3.2 m depth in 118° direction	2.9 on February 21, 2018	Blocked at 1.2 m	September 25, 2020	N/A	N/A	N/A
		1.0 mm over 13.0 to 14.8 m depth in 78° direction	3.5 on October 18, 2017			N/A	N/A	N/A
SI17-5	September 18, 2017	36.4 mm over 0.1 to 2.0 m depth in 56° direction	43.9 on September 17, 2018	Blocked at 1.2 m	May 28, 2020	N/A	N/A	N/A
		1.2 mm over 12.3 to 14.2 m depth in 56° direction	2.0 on September 17, 2018			N/A	N/A	N/A

Figure 32122-NC089 in Appendix A provides a sketch of the approximate location of the monitoring instrumentation for this site.

Table NC089-1 – Continued: Spring 2024 – Hwy 63:12 Beacon Hill Backslope Slide (Km 8.7) Slope Inclinometer Instrumentation Reading Summary

Date Monitored: June 11, 2024

INSTRUMENT #	DATE INITIALIZED	TOTAL CUMULATIVE RESULTANT MOVEMENT AND DEPTH OF MOVEMENT TO DATE (mm)	MAXIMUM RATE OF MOVEMENT (mm/yr)	CURRENT STATUS OF SI	DATE OF PREVIOUS READING	INCREMENTAL MOVEMENT SINCE PREVIOUS READING (mm)	CURRENT RATE OF MOVEMENT (mm/yr)	CHANGE IN RATE OF MOVEMENT SINCE PREVIOUS READING (mm/yr)
SI17-7 (Replacement for SI12-09)	September 18, 2017	24.3 mm over 1.6 to 3.4 m depth in 29° direction	60.8 in September 2020	Operational	May 30, 2023	0.7	0.7	1.2
		3.0 mm over 22.9 to 24.1 m depth in 29° direction	2.3 in September 2020			0.3	0.3	<0.1

Figure 32122-NC089 in Appendix A provides a sketch of the approximate location of the monitoring instrumentation for this site.

Table NC089-2: Spring 2024 – Hwy 63:12 Beacon Hill Backslope Slide (Km 8.7) Pneumatic Piezometer Instrumentation Reading Summary

Date Monitored: June 11, 2024

INSTRUMENT #	DATE INITIALIZED	TIP DEPTH (m)	CURRENT STATUS	HIGHEST MEASURED GROUNDWATER DEPTH (m)	MEASURED PORE PRESSURE (kPa)	CURRENT GROUNDWATER DEPTH (m)	PREVIOUS GROUNDWATER DEPTH (m)	CHANGE IN WATER LEVEL SINCE PREVIOUS READING (m)
PN17-1A (37677)	September 18, 2017	8.0	Operational	5.07 on June 11, 2024	28.7	5.07	5.54	0.47
PN17-1B (37659)	September 18, 2017	15.5	Operational	10.43 on October 18, 2017	33.5	12.09	12.26	0.17
PN17-2A (37666)	September 18, 2017	13.0	Operational	6.25 on June 3, 2022	63.4	6.54	6.64	0.10
PN17-2B (37494)	September 18, 2017	21.6	Operational	21.20 on February 21, 2018	1.8	21.42	21.37	-0.05
PN17-3A (37665)	September 18, 2017	4.7	Operational	1.14 on May 30, 2023	34.2	1.21	1.14	-0.07
PN17-3B (37495)	September 18, 2017	14.6	Operational	9.33 on September 25, 2020	20.6	12.50	12.43	-0.07
PN17-4 (37674)	September 18, 2017	8.0	Operational	3.04 on June 11, 2024	48.7	3.04	4.55	1.51

Figure 32122-NC089-1 in Appendix A provides a sketch of the approximate location of the monitoring instrumentation for this site.



Table NC089-2 – Continued: Spring 2024 – Hwy 63:12 Beacon Hill Backslope Slide (Km 8.7) Pneumatic Piezometer Instrumentation Reading Summary

Date Monitored: June 11, 2024

INSTRUMENT #	DATE INITIALIZED	TIP DEPTH (m)	CURRENT STATUS	HIGHEST MEASURED GROUNDWATER DEPTH (m)	MEASURED PORE PRESSURE (kPa)	CURRENT GROUNDWATER DEPTH (m)	PREVIOUS GROUNDWATER DEPTH (m)	CHANGE IN WATER LEVEL SINCE PREVIOUS READING (m)
PN17-5A (37667)	September 18, 2017	8.9	Operational	8.83 on September 25, 2020	0.3	8.87	8.83	-0.04
PN17-5B (37660)	September 18, 2017	14.8	Operational	9.95 on September 25, 2020	46.1	10.10	9.95	-0.15
PN17-6A (37664)	September 18, 2017	9.7	Operational	5.35 on October 18, 2017	30.8	6.56	6.68	0.12
PN17-6B (37493)	September 18, 2017	18.5	Operational	18.11 on February 21, 2018	0.4	18.46	18.45	-0.01
PN17-7A (37675)	September 18, 2017	8.0	Operational	5.91 on June 3, 2022	8.9	7.09	7.56	0.47
PN17-7B (37477)	September 18, 2017	18.0	Operational	17.59 on February 21, 2018	0.5	17.95	17.91	-0.04
PN17-7C (37661)	September 18, 2017	28.0	Operational	21.77 on May 29, 2018	60.0	21.88	22.43	0.55

Figure 32122-NC089-1 in Appendix A provides a sketch of the approximate location of the monitoring instrumentation for this site.



STATEMENT OF LIMITATIONS AND CONDITIONS

1. STANDARD OF CARE

This Report has been prepared in accordance with generally accepted engineering or environmental consulting practices in the applicable jurisdiction. No other warranty, expressed or implied, is intended or made.

2. COMPLETE REPORT

All documents, records, data and files, whether electronic or otherwise, generated as part of this assignment are a part of the Report, which is of a summary nature and is not intended to stand alone without reference to the instructions given to Thurber by the Client, communications between Thurber and the Client, and any other reports, proposals or documents prepared by Thurber for the Client relative to the specific site described herein, all of which together constitute the Report.

IN ORDER TO PROPERLY UNDERSTAND THE SUGGESTIONS, RECOMMENDATIONS AND OPINIONS EXPRESSED HEREIN, REFERENCE MUST BE MADE TO THE WHOLE OF THE REPORT. THURBER IS NOT RESPONSIBLE FOR USE BY ANY PARTY OF PORTIONS OF THE REPORT WITHOUT REFERENCE TO THE WHOLE REPORT.

3. BASIS OF REPORT

The Report has been prepared for the specific site, development, design objectives and purposes that were described to Thurber by the Client. The applicability and reliability of any of the findings, recommendations, suggestions, or opinions expressed in the Report, subject to the limitations provided herein, are only valid to the extent that the Report expressly addresses proposed development, design objectives and purposes, and then only to the extent that there has been no material alteration to or variation from any of the said descriptions provided to Thurber, unless Thurber is specifically requested by the Client to review and revise the Report in light of such alteration or variation.

4. USE OF THE REPORT

The information and opinions expressed in the Report, or any document forming part of the Report, are for the sole benefit of the Client. NO OTHER PARTY MAY USE OR RELY UPON THE REPORT OR ANY PORTION THEREOF WITHOUT THURBER'S WRITTEN CONSENT AND SUCH USE SHALL BE ON SUCH TERMS AND CONDITIONS AS THURBER MAY EXPRESSLY APPROVE. Ownership in and copyright for the contents of the Report belong to Thurber. Any use which a third party makes of the Report, is the sole responsibility of such third party. Thurber accepts no responsibility whatsoever for damages suffered by any third party resulting from use of the Report without Thurber's express written permission.

5. INTERPRETATION OF THE REPORT

- a) Nature and Exactness of Soil and Contaminant Description: Classification and identification of soils, rocks, geological units, contaminant materials and quantities have been based on investigations performed in accordance with the standards set out in Paragraph 1. Classification and identification of these factors are judgmental in nature. Comprehensive sampling and testing programs implemented with the appropriate equipment by experienced personnel may fail to locate some conditions. All investigations utilizing the standards of Paragraph 1 will involve an inherent risk that some conditions will not be detected and all documents or records summarizing such investigations will be based on assumptions of what exists between the actual points sampled. Actual conditions may vary significantly between the points investigated and the Client and all other persons making use of such documents or records with our express written consent should be aware of this risk and the Report is delivered subject to the express condition that such risk is accepted by the Client and such other persons. Some conditions are subject to change over time and those making use of the Report should be aware of this possibility and understand that the Report only presents the conditions at the sampled points at the time of sampling. If special concerns exist, or the Client has special considerations or requirements, the Client should disclose them so that additional or special investigations may be undertaken which would not otherwise be within the scope of investigations made for the purposes of the Report.
- b) Reliance on Provided Information: The evaluation and conclusions contained in the Report have been prepared on the basis of conditions in evidence at the time of site inspections and on the basis of information provided to Thurber. Thurber has relied in good faith upon representations, information and instructions provided by the Client and others concerning the site. Accordingly, Thurber does not accept responsibility for any deficiency, misstatement or inaccuracy contained in the Report as a result of misstatements, omissions, misrepresentations, or fraudulent acts of the Client or other persons providing information relied on by Thurber. Thurber is entitled to rely on such representations, information and instructions and is not required to carry out investigations to determine the truth or accuracy of such representations, information and instructions.
- c) Design Services: The Report may form part of design and construction documents for information purposes even though it may have been issued prior to final design being completed. Thurber should be retained to review final design, project plans and related documents prior to construction to confirm that they are consistent with the intent of the Report. Any differences that may exist between the Report's recommendations and the final design detailed in the contract documents should be reported to Thurber immediately so that Thurber can address potential conflicts.
- d) Construction Services: During construction Thurber should be retained to provide field reviews. Field reviews consist of performing sufficient and timely observations of encountered conditions in order to confirm and document that the site conditions do not materially differ from those interpreted conditions considered in the preparation of the report. Adequate field reviews are necessary for Thurber to provide letters of assurance, in accordance with the requirements of many regulatory authorities.

6. RELEASE OF POLLUTANTS OR HAZARDOUS SUBSTANCES

Geotechnical engineering and environmental consulting projects often have the potential to encounter pollutants or hazardous substances and the potential to cause the escape, release or dispersal of those substances. Thurber shall have no liability to the Client under any circumstances, for the escape, release or dispersal of pollutants or hazardous substances, unless such pollutants or hazardous substances have been specifically and accurately identified to Thurber by the Client prior to the commencement of Thurber's professional services.

7. INDEPENDENT JUDGEMENTS OF CLIENT

The information, interpretations and conclusions in the Report are based on Thurber's interpretation of conditions revealed through limited investigation conducted within a defined scope of services. Thurber does not accept responsibility for independent conclusions, interpretations, interpolations and/or decisions of the Client, or others who may come into possession of the Report, or any part thereof, which may be based on information contained in the Report. This restriction of liability includes but is not limited to decisions made to develop, purchase or sell land.



THURBER ENGINEERING LTD.

**ALBERTA TRANSPORTATION AND ECONOMIC CORRIDORS GRMP (CON0022163)
NORTH CENTRAL (ATHABASCA AND FORT McMURRAY DISTRICTS)
INSTRUMENTATION MONITORING RESULTS**

SPRING 2024

**APPENDIX A
DATA PRESENTATION AND SITE PLANS**

SITE NC089: HWY 63:12 BEACON HILL BACKSLOPE SLIDE (km 8.7)

**ALBERTA TRANSPORTATION AND ECONOMIC CORRIDORS
NORTH CENTRAL REGION - ATHABASCA AND FORT McMURRAY DISTRICTS
INSTRUMENTATION MONITORING FIELD SUMMARY (NC089)
SPRING 2024**

Location: HWY 63:12 Beacon Hill Backslope Slide	Readout: RST PN C108 Unit 4
File Number: 32122	Casing Diameter: 2.75"
Probe: RST SI SET 8R	Temp: 10
Cable: RST SI SET 8R	Read by: NKR/NRM

SLOPE INCLINOMETER (SI) READINGS


SI#	GPS Location (UTM 12)		Date	Stickup (m)	Readings Depth from top of casing (ft)	Azimuth of A+ Groove degree	Current Bottom Depth Readings				Probe/ Reel #	Size (")	Remarks
	Northing	Easting					A+	A-	B+	B-			
SI17-2	6284103	478503	11-Jun-24	0.95	82 to 2	60	-520	537	-168	166	5R/5R	2.75	
SI17-7	6284102	478453	11-Jun-24	0.55	98 to 2	40	1711	-1701	361	-359	5R/5R	2.75	

PNEUMATIC PIEZOMETER (PN) READINGS

PN #	Serial	GPS Location (UTM 12)		Location	Date	Reading (kPa)	Comments
		Northing	Easting				
PN17-1A	37677	6284070	478515		11-Jun-24	28.7	
PN17-1B	37659	6284070	478515		11-Jun-24	33.5	
PN17-2A	37666	6284103	478503	Attached to SI17-2	11-Jun-24	63.4	
PN17-2B	37494	6284103	478503	Attached to SI17-2	11-Jun-24	1.8	
PN17-3A	37665	6284125	478484	Attached to SI17-3	11-Jun-24	34.2	
PN17-3B	37495	6284125	478484	Attached to SI17-3	11-Jun-24	20.6	
PN17-4	37674	6284139	478507	Attached to SI17-4	11-Jun-24	48.7	*
PN17-5A	37667	6284177	478476	Attached to SI17-5	11-Jun-24	0.3	
PN17-5B	37660	6284177	478476	Attached to SI17-5	11-Jun-24	46.1	
PN17-6A	37664	6284194	478502		11-Jun-24	30.8	
PN17-6B	37493	6284194	478502		11-Jun-24	0.4	
PN17-7A	37675	6284102	478453	Attached to SI17-7	11-Jun-24	8.9	
PN17-7B	37477	6284102	478453	Attached to SI17-7	11-Jun-24	0.5	
PN17-7C	37661	6284102	478453	Attached to SI12-7	11-Jun-24	60	

INSPECTOR REPORT


* Clear SI17-4, Water seepage and running down the slope.

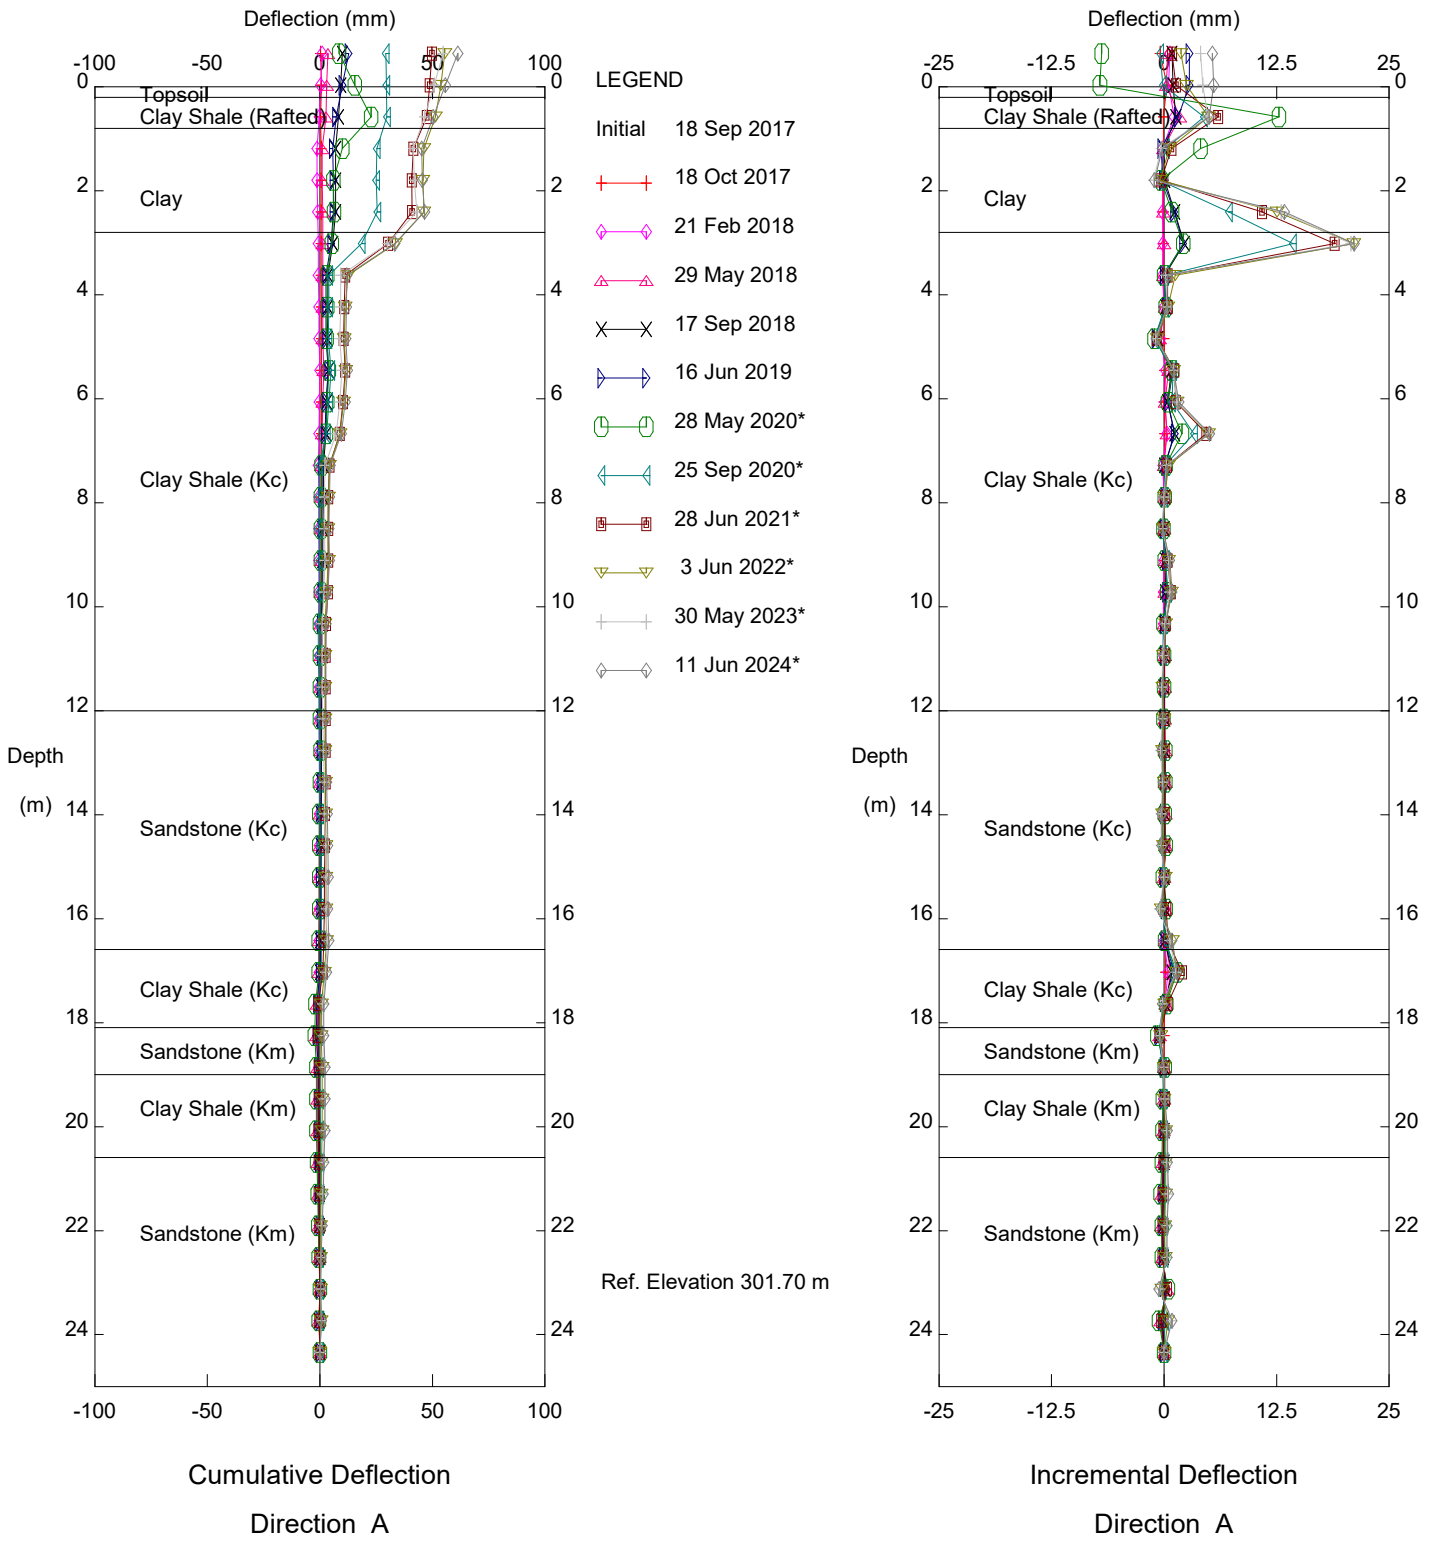

NC089 - Beacon Hill Backslope Slide, Inclinometer SI17-2

Alberta Transportation


Sets marked * include zero shift and/or rotation corrections.

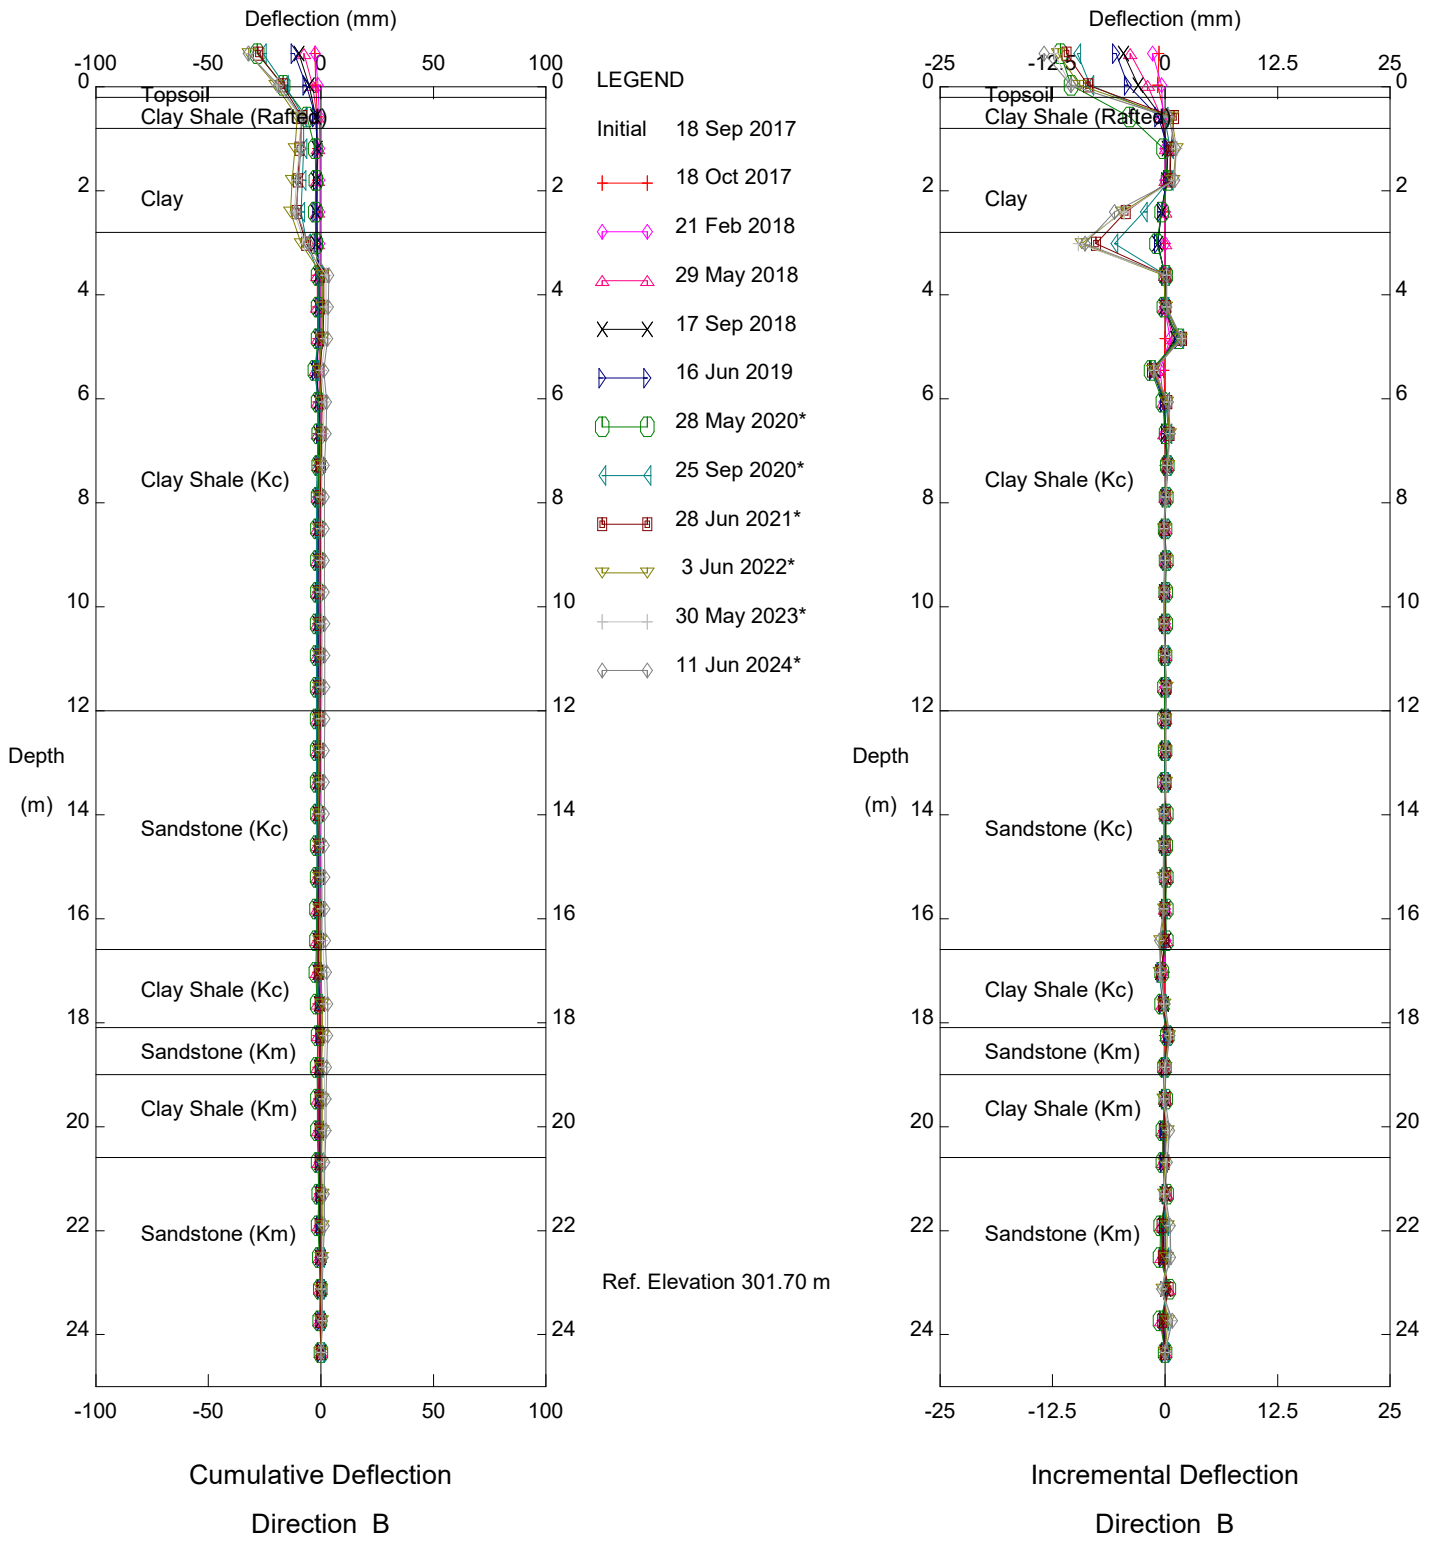

NC089 - Beacon Hill Backslope Slide, Inclinometer SI17-2

Alberta Transportation

Sets marked * include zero shift and/or rotation corrections.

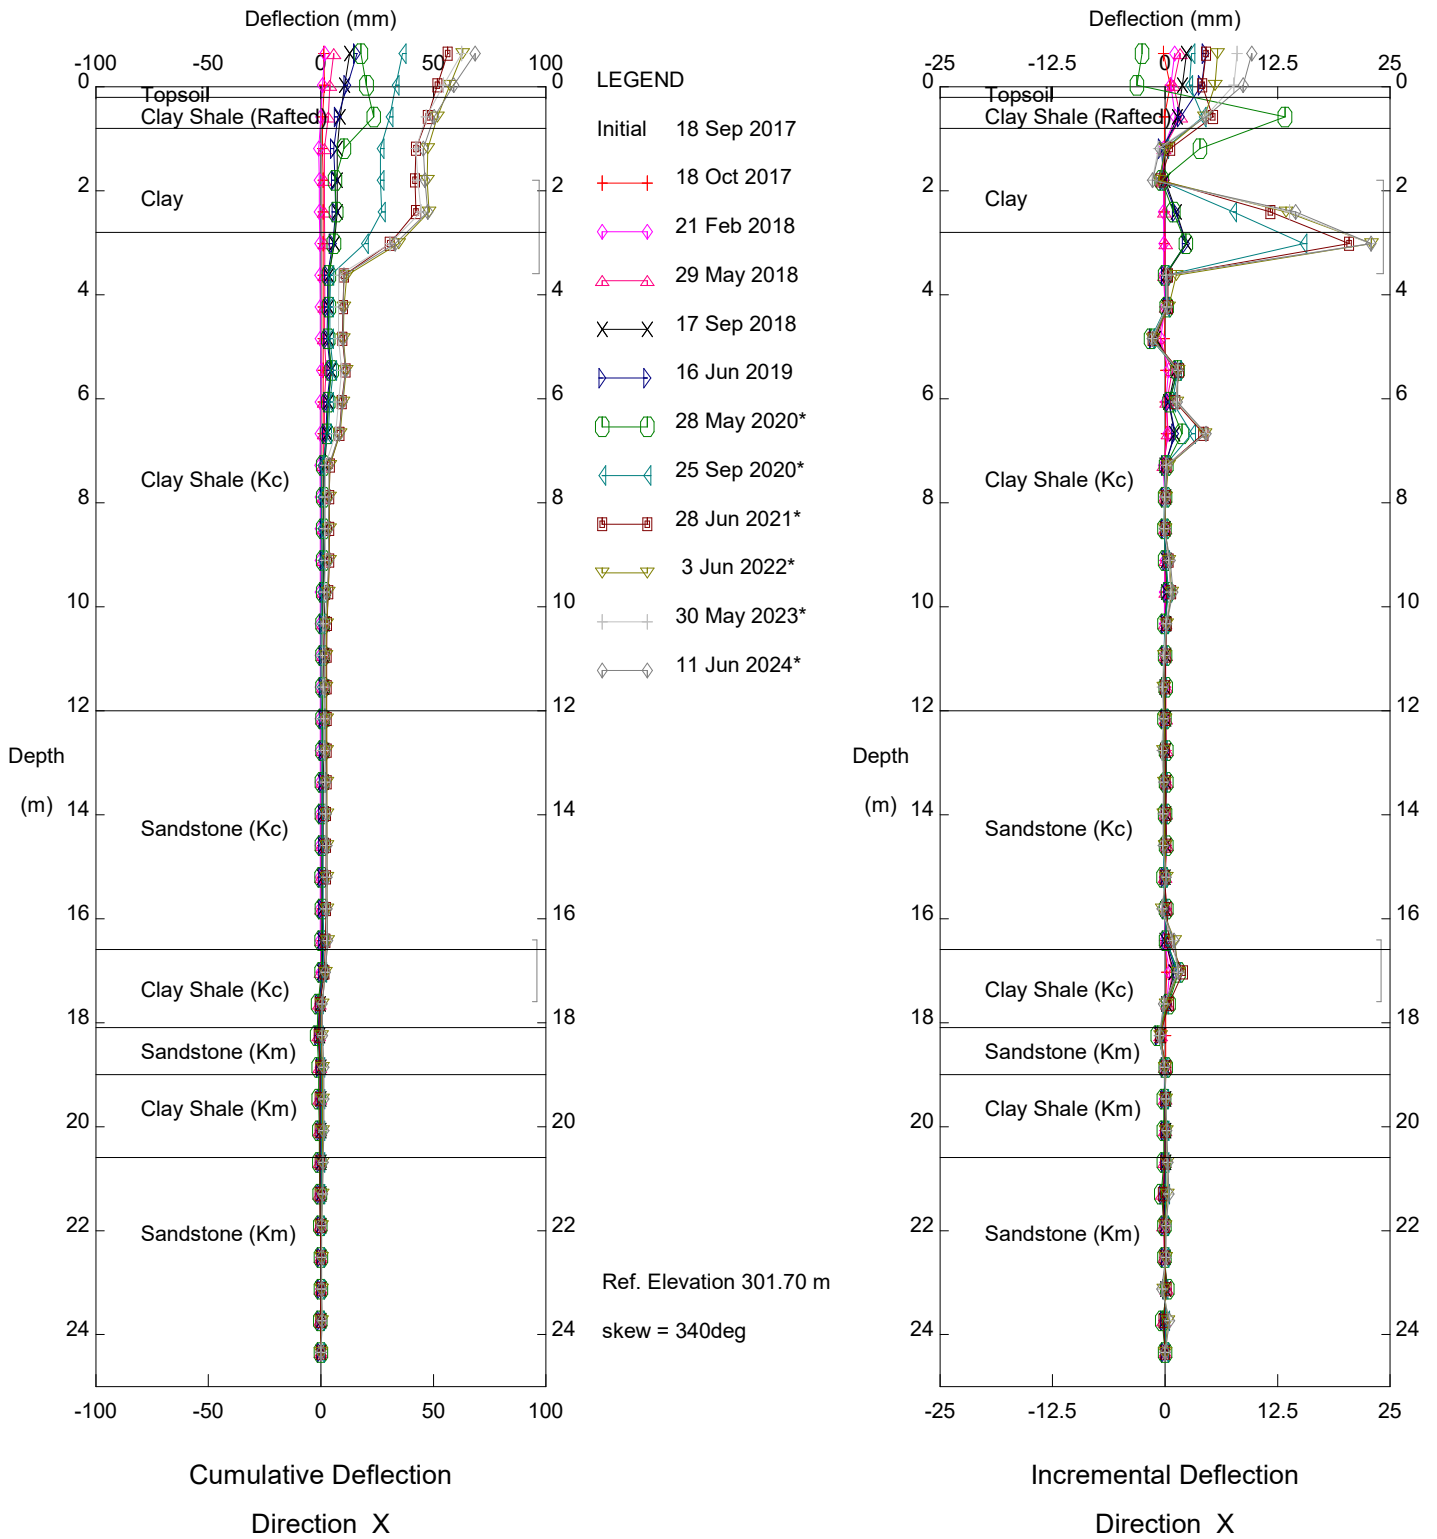


NC089 - Beacon Hill Backslope Slide, Inclinometer SI17-2

Alberta Transportation


Sets marked * include zero shift and/or rotation corrections.

Thurber Engineering Ltd.

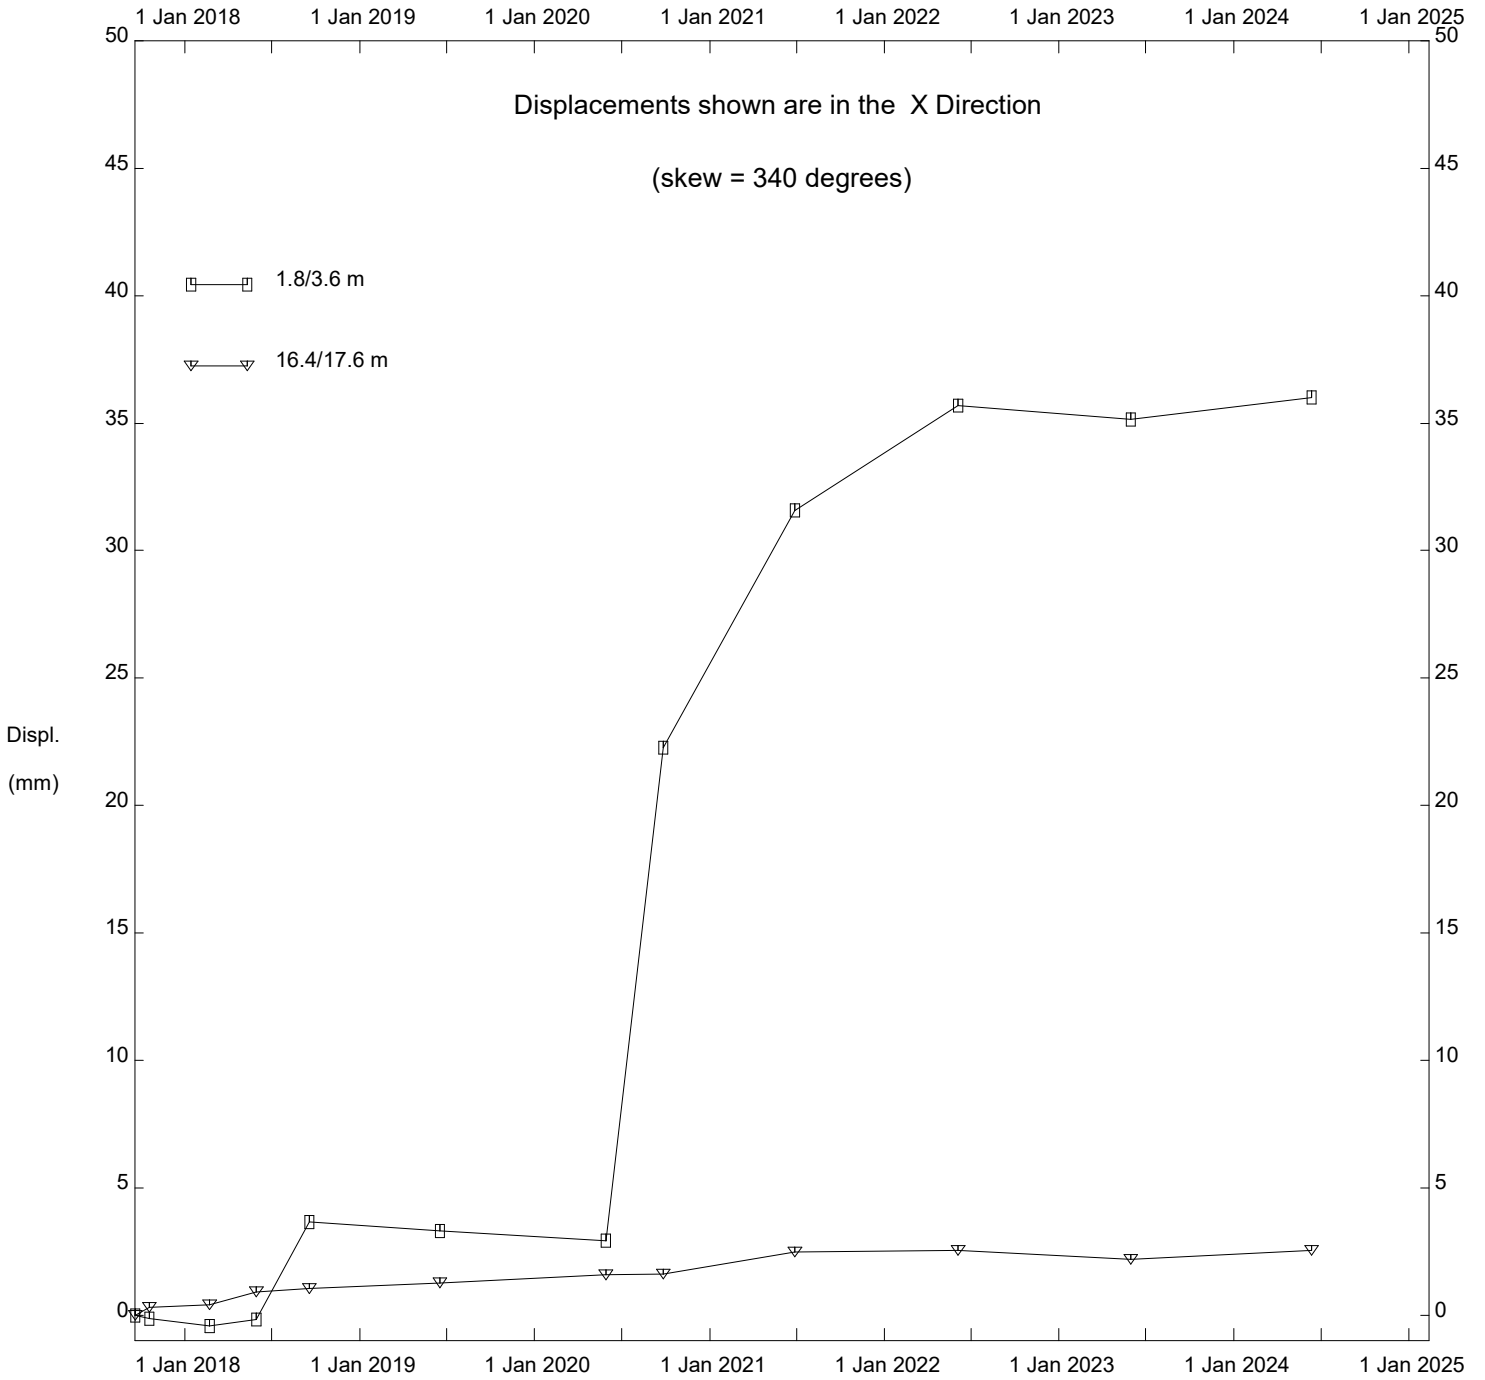

NC089 - Beacon Hill Backslope Slide, Inclinometer SI17-2

Alberta Transportation

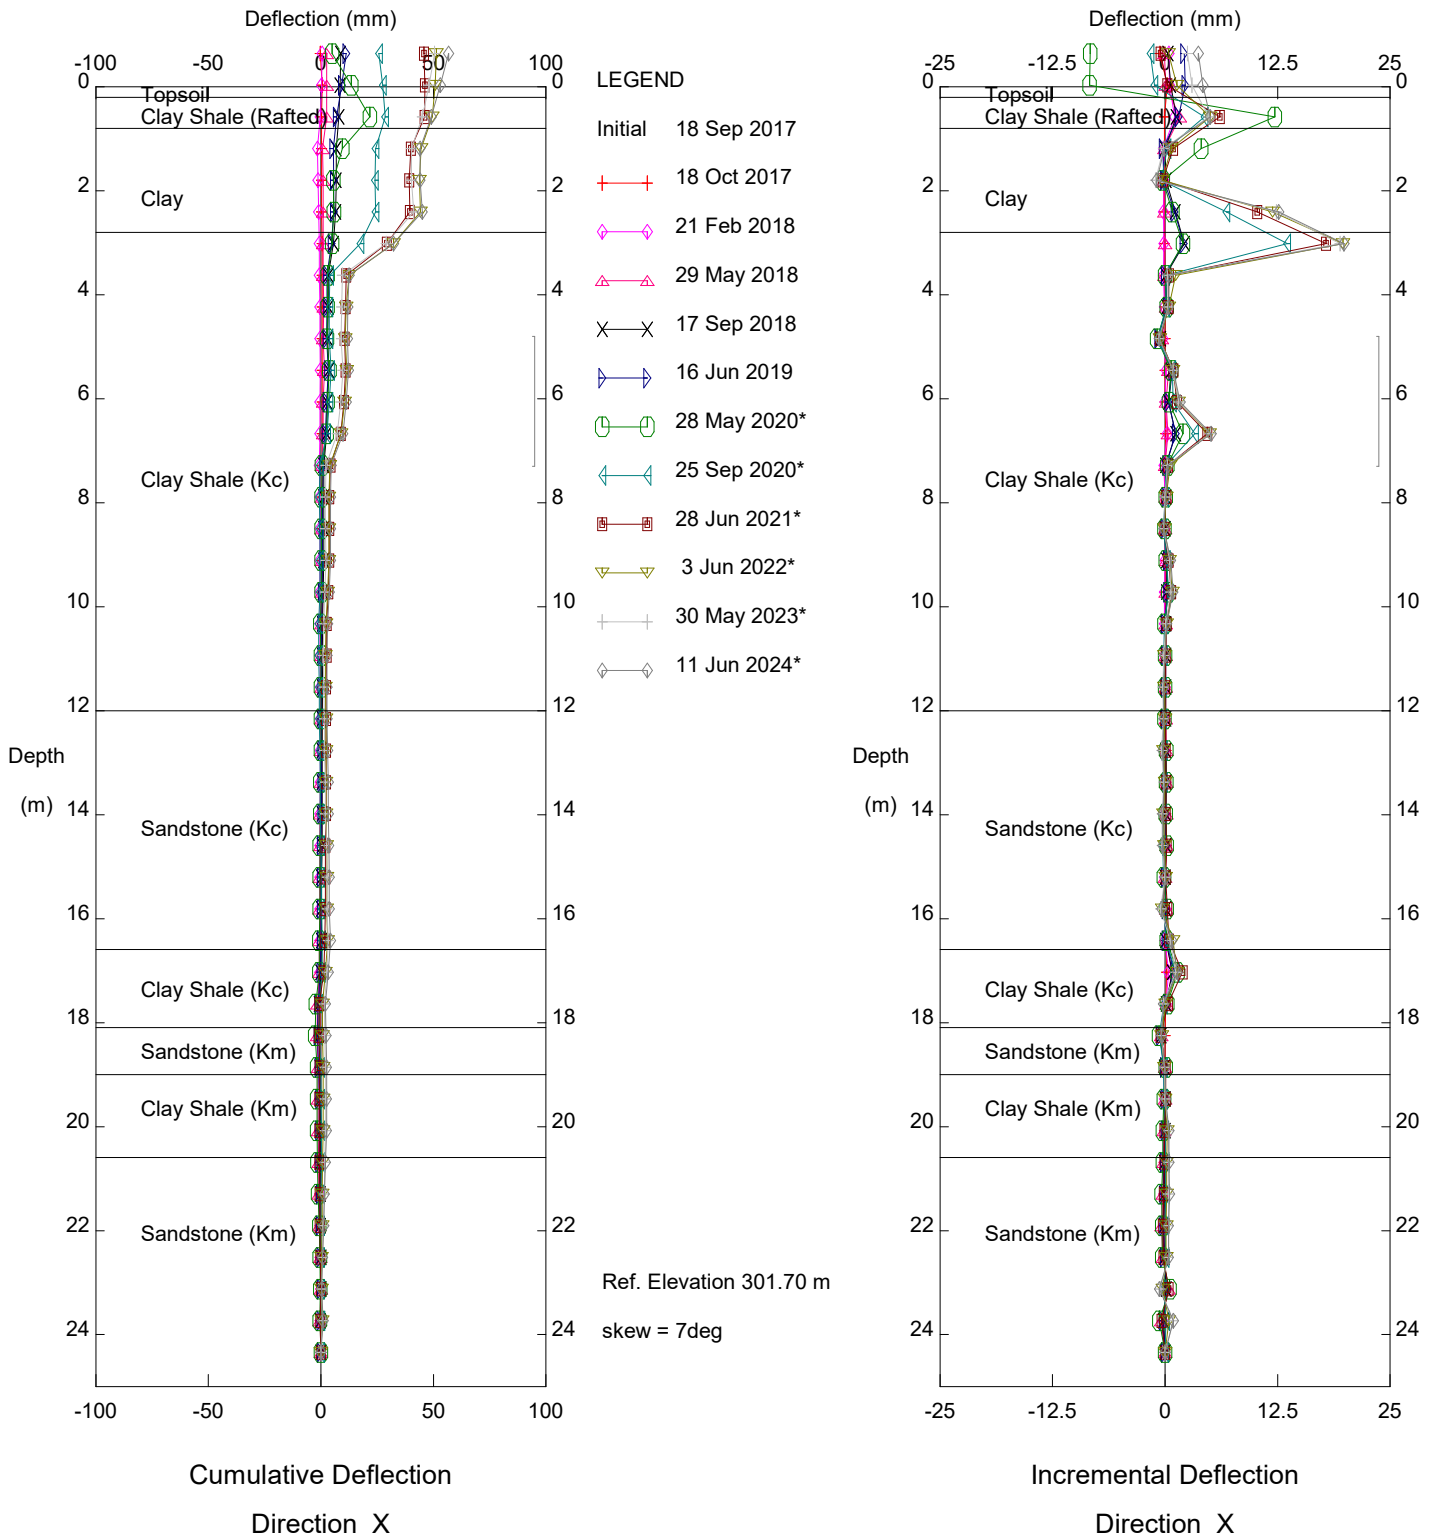


NC089 - Beacon Hill Backslope Slide, Inclinometer SI17-2

Alberta Transportation

Sets marked * include zero shift and/or rotation corrections.


Thurber Engineering Ltd.

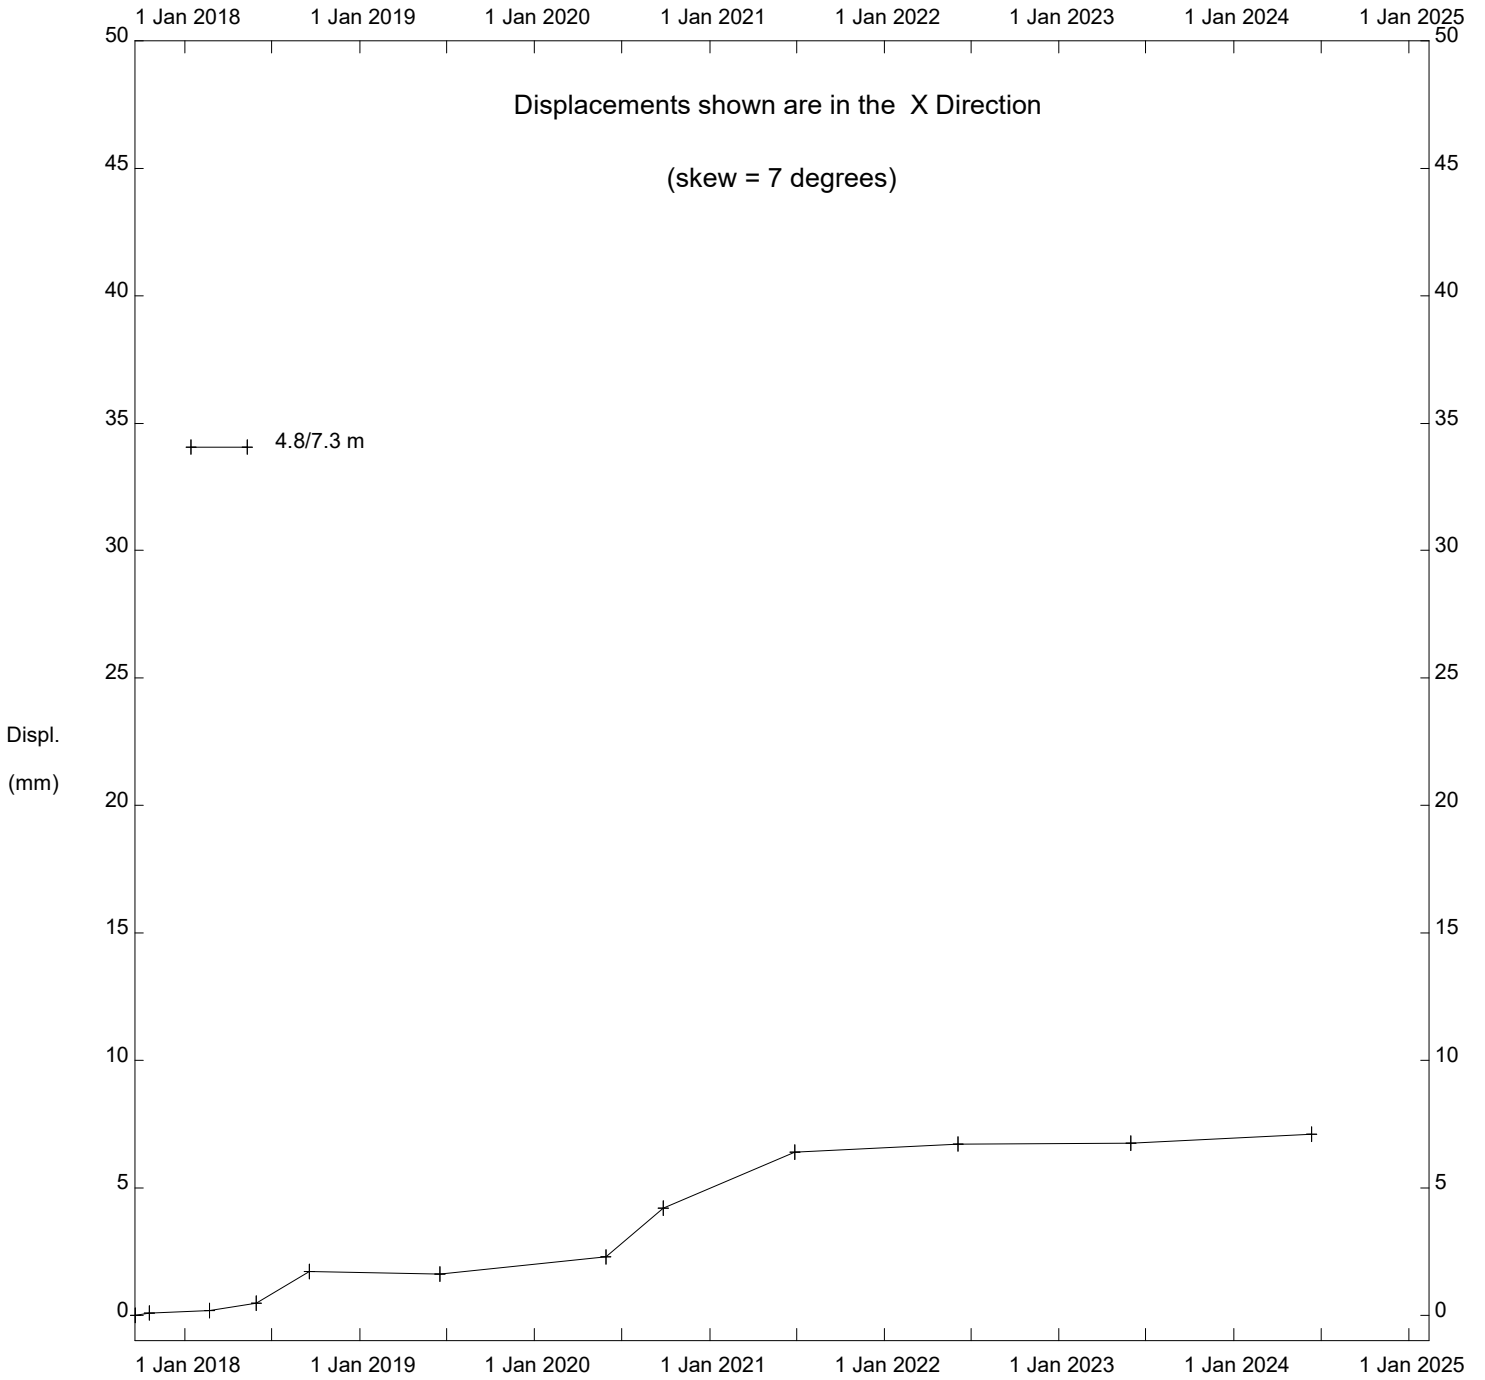

NC089 - Beacon Hill Backslope Slide, Inclinator SI17-2

Alberta Transportation

Thurber Engineering Ltd.

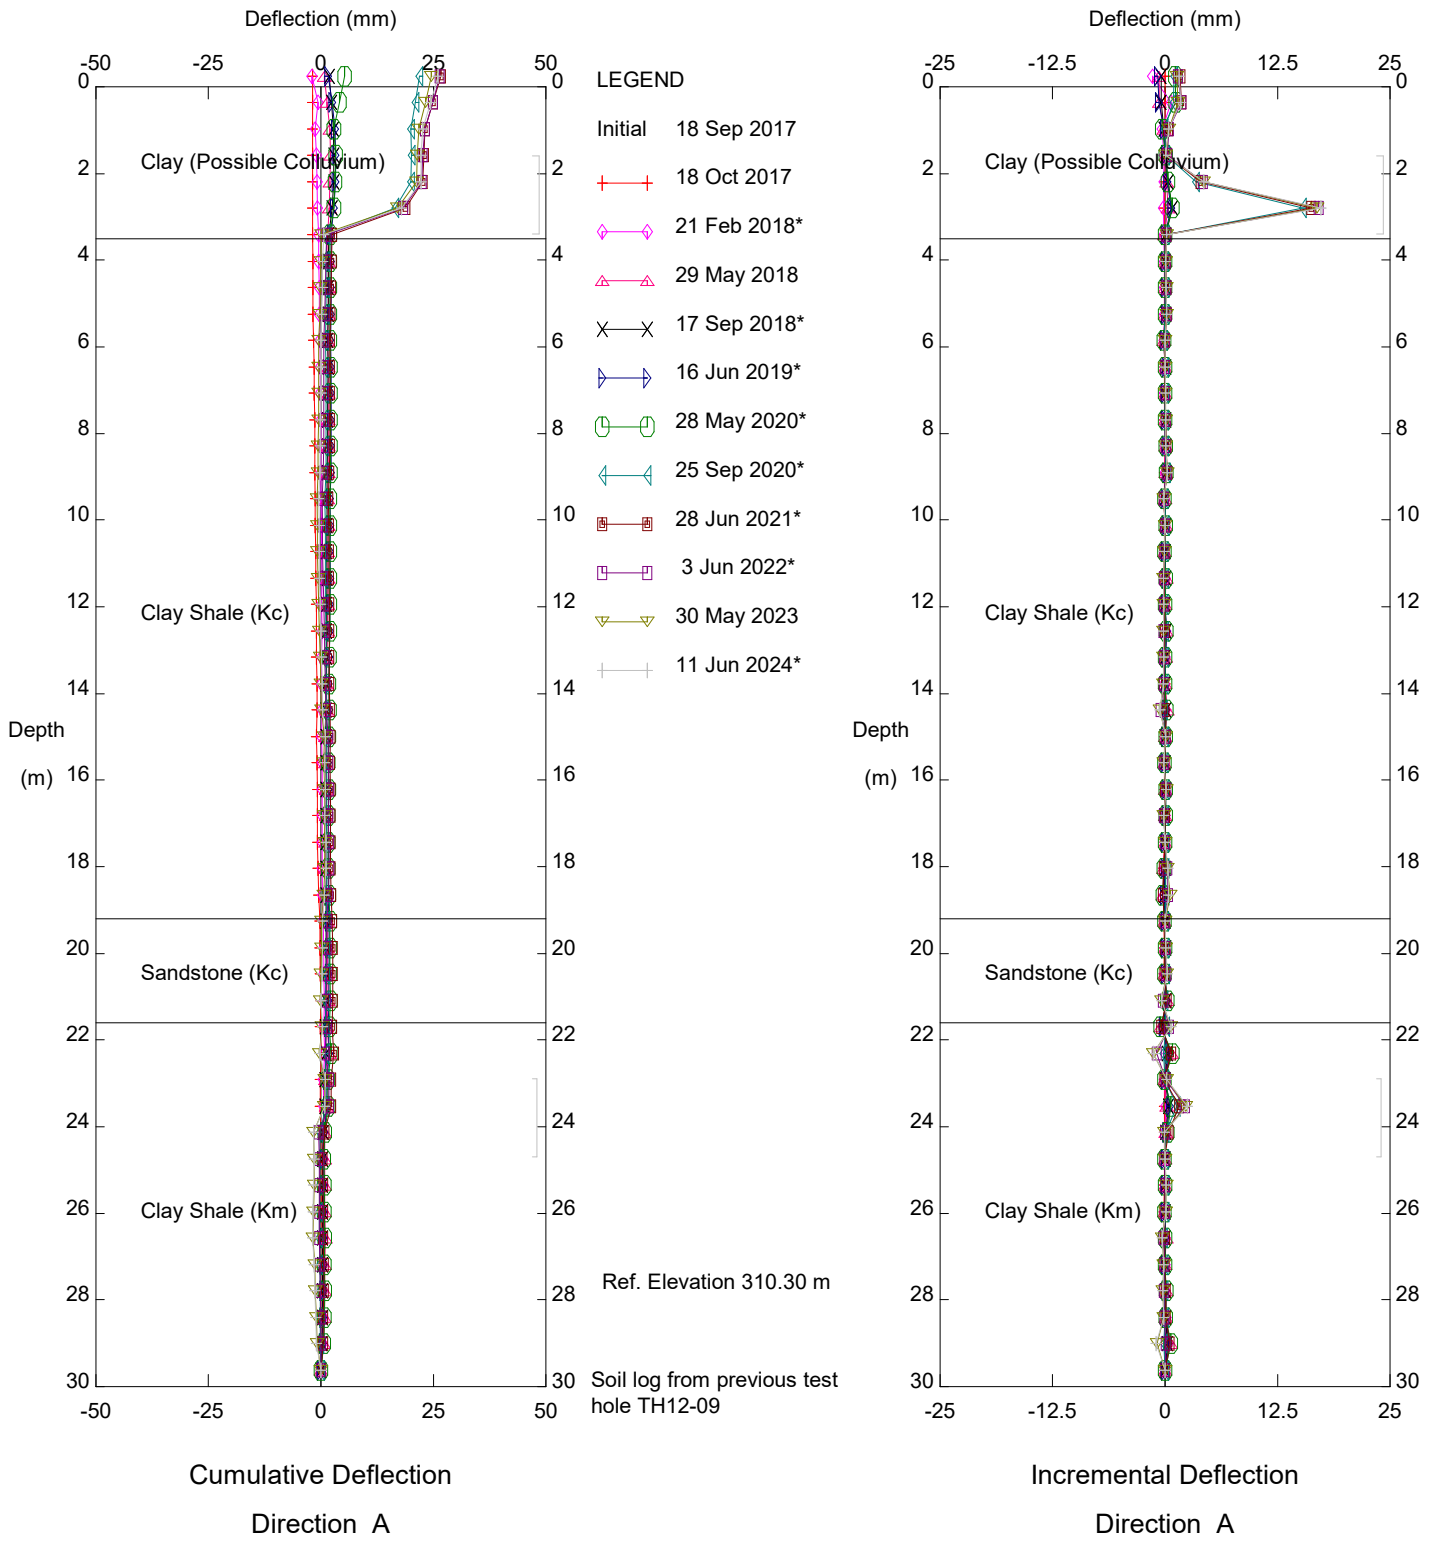


NC089 - Beacon Hill Backslope Slide, Inclinometer S117-7

Alberta Transportation

Sets marked * include zero shift and/or rotation corrections.

Thurber Engineering Ltd.

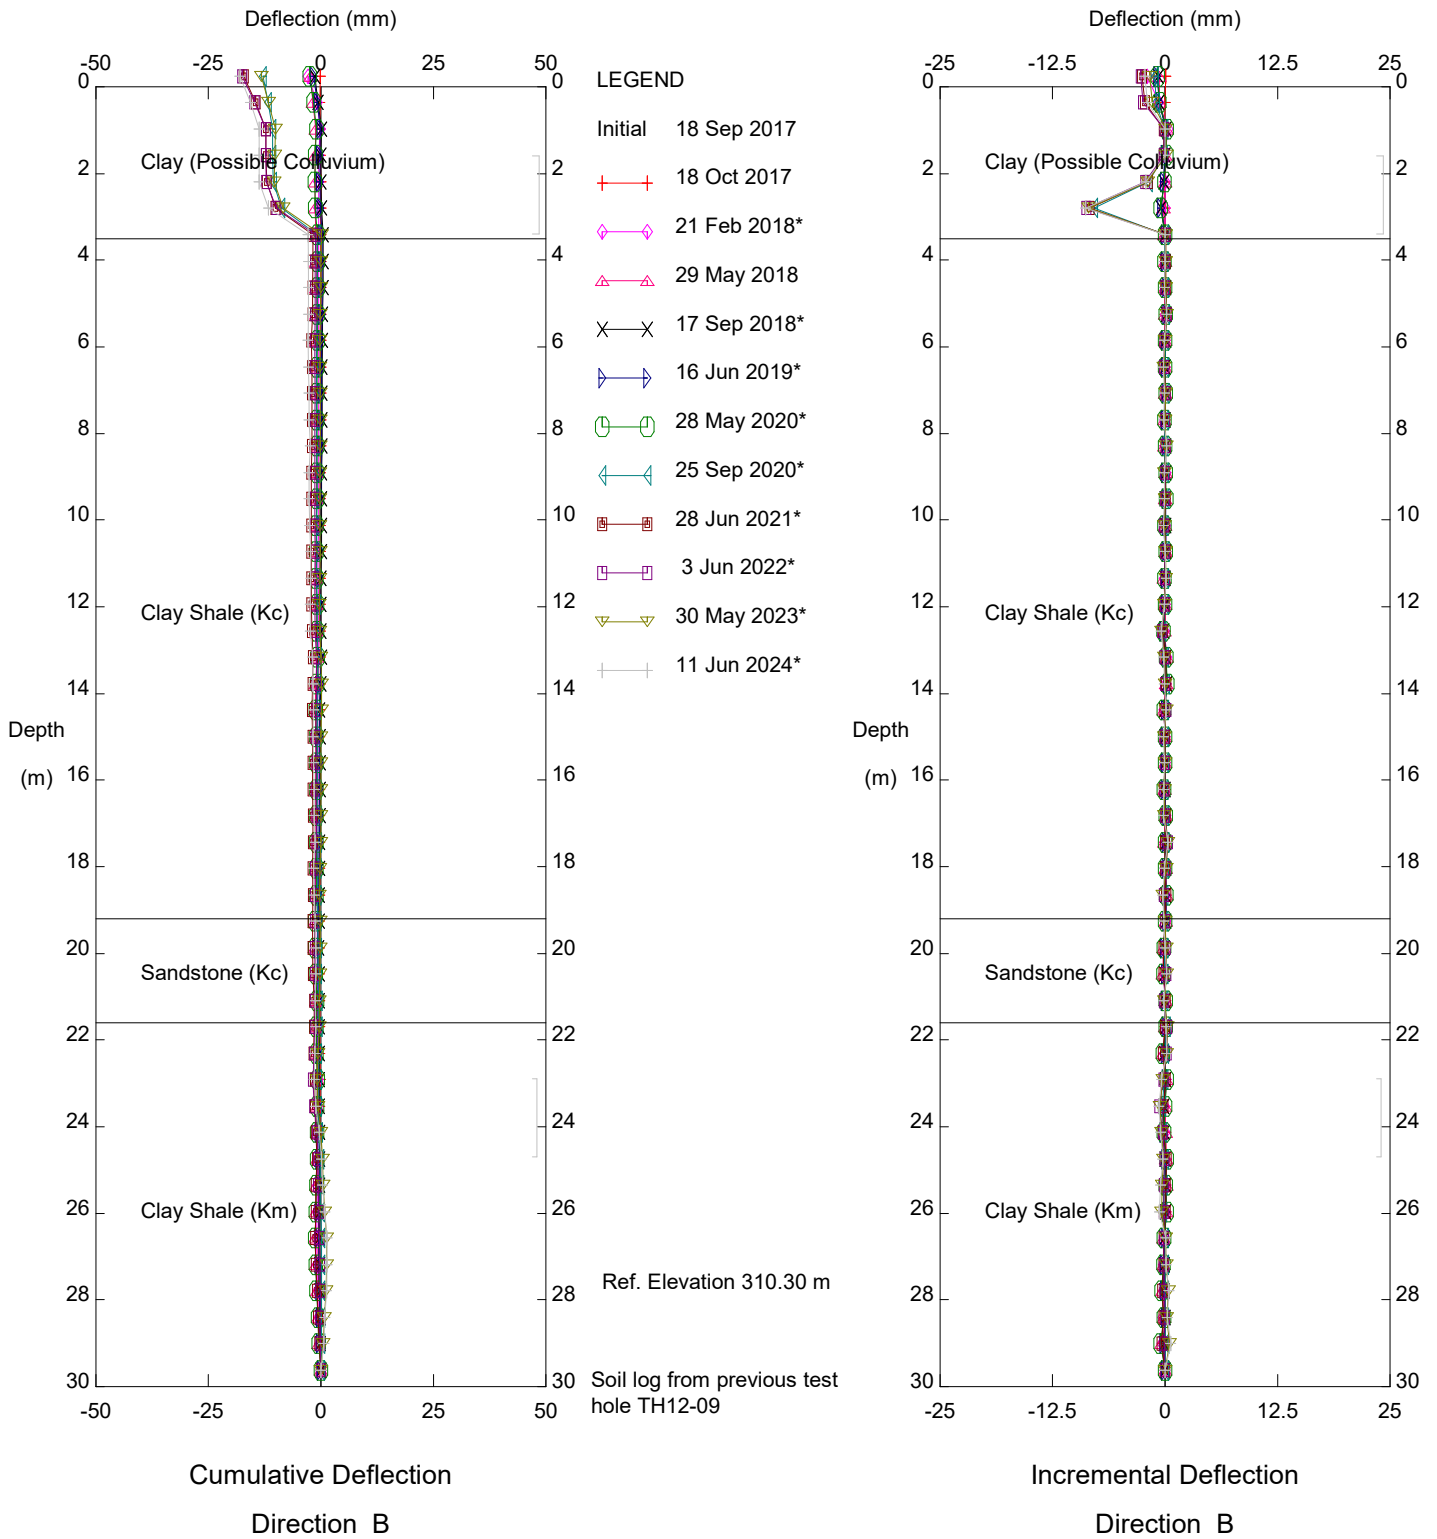


NC089 - Beacon Hill Backslope Slide, Inclinometer S117-7

Alberta Transportation

Sets marked * include zero shift and/or rotation corrections.

Thurber Engineering Ltd.

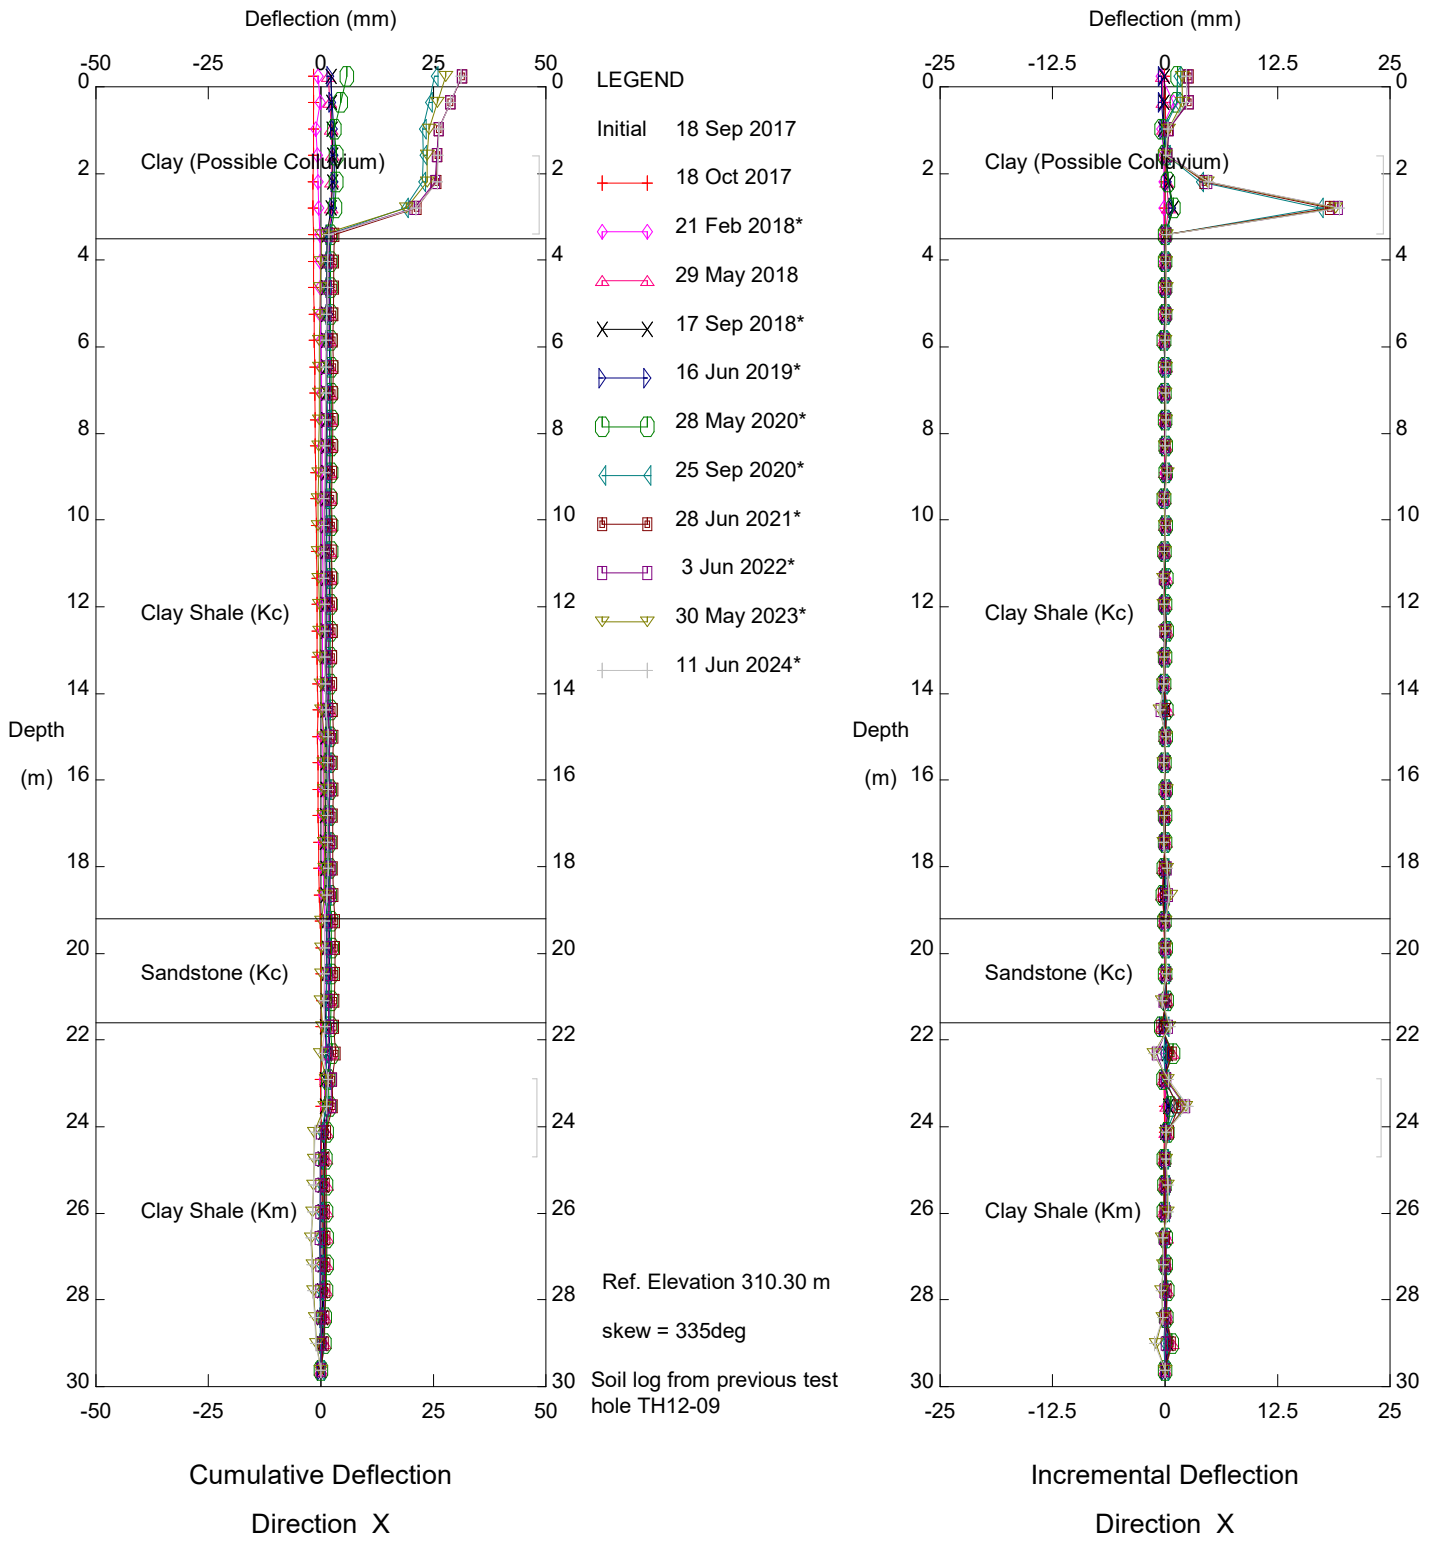


NC089 - Beacon Hill Backslope Slide, Inclinometer SI17-7

Alberta Transportation

Sets marked * include zero shift and/or rotation corrections.

Thurber Engineering Ltd.

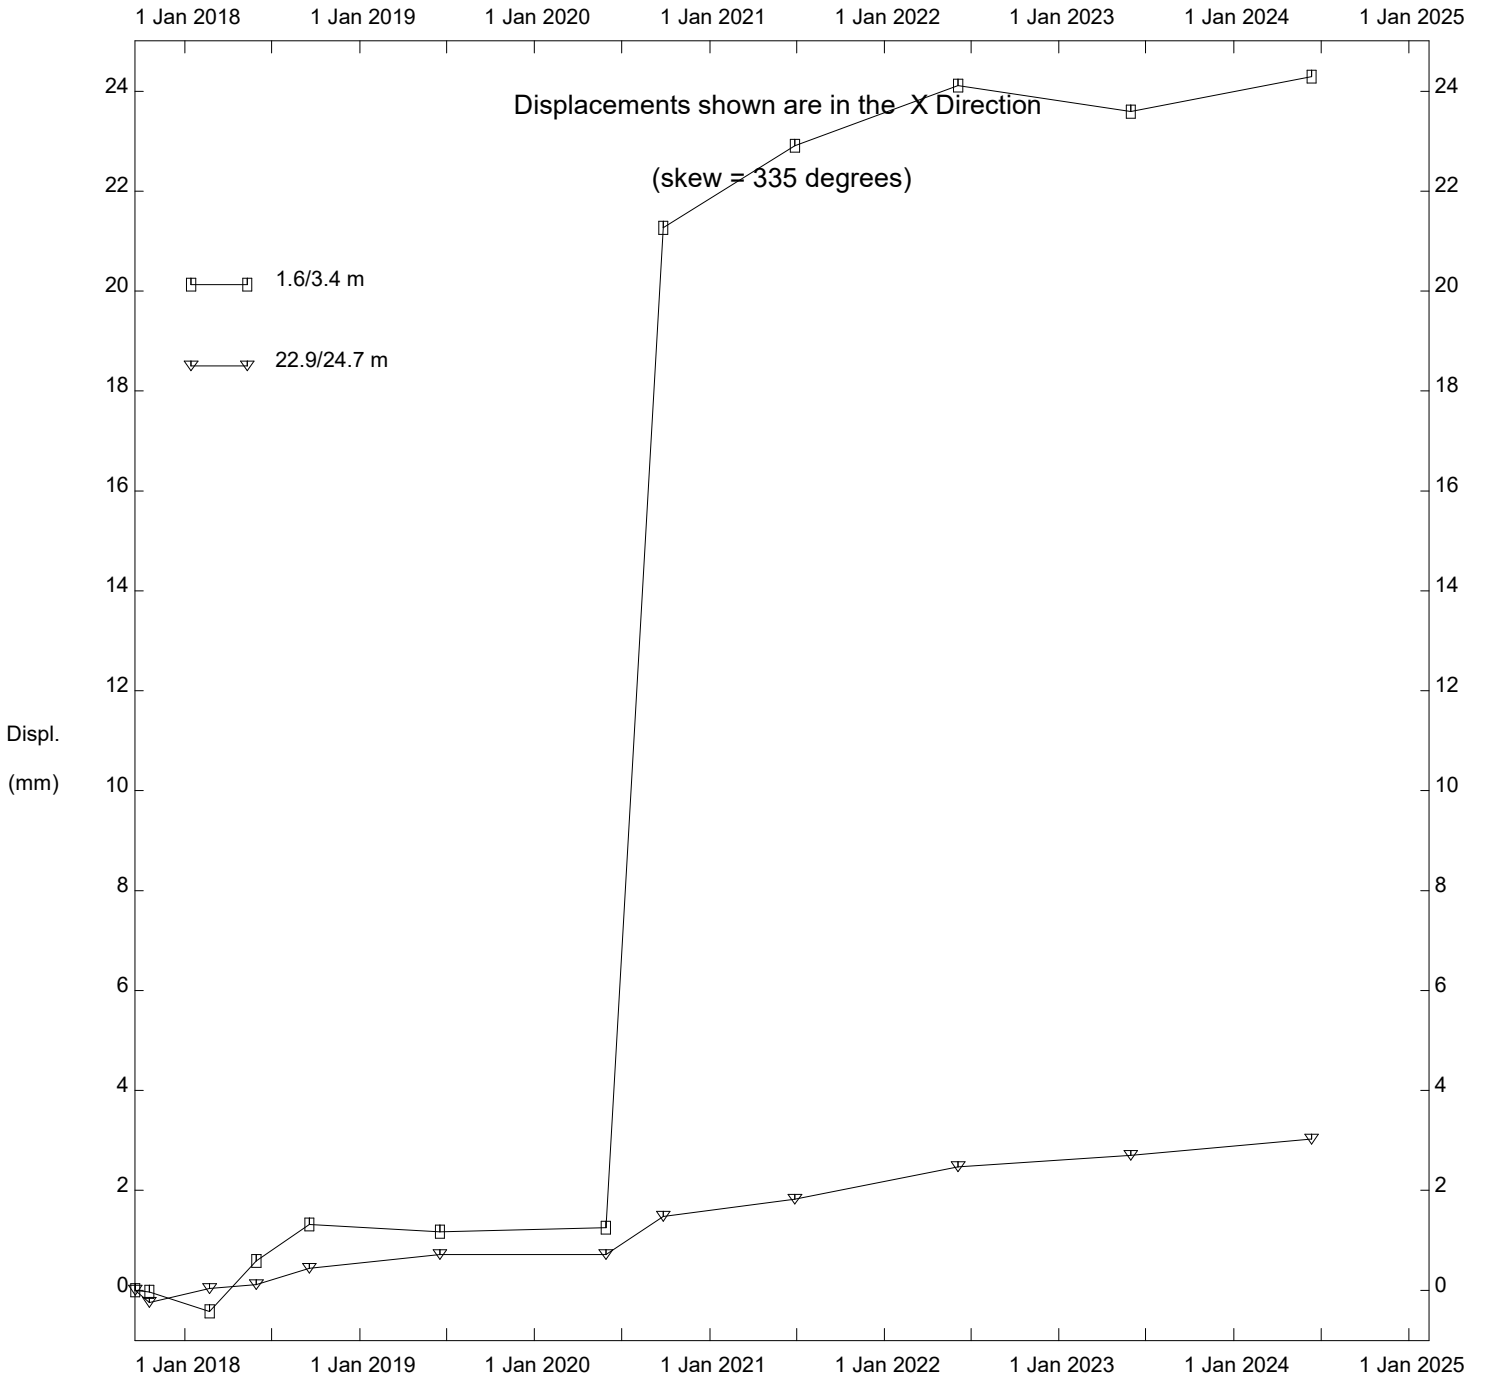

NC089 - Beacon Hill Backslope Slide, Inclinometer SI17-7

Alberta Transportation

**FIGURE NC089-1
PIEZOMETER DATA FOR HWY 63:12 BEACON HILL**

