

Approach Road Inspection and Rating



Technical Standards Branch
Class B Bridge Inspection Course



Introduction

- Approach road is the road leading up to the bridge structure
- For culverts it includes the road fill over the culvert
- Considers
 - Geometric alignment at the bridge site
 - Condition of approach fill
 - Inventory and condition of guardrail on approaches
 - Drainage on approaches to bridge



Technical Standards Branch
Class B Bridge Inspection Course



Approach Road Section - Bridges

Approach Road			
	Last	Now	Explanation of Condition
Horizontal Alignment			
Vertical Alignment			
Roadway Width (m)			
Approach Bump			
Guardrail (Y/N)			
Guardrail			
Length (m)			
Current Standard (Y/N)			
Termination Type			
Drainage			
Approach Road General Rating			



Technical Standards Branch
Class B Bridge Inspection Course



Road Use

- Roads are used by:
 - People who may have reduced abilities
 - People who just got licenses
 - Immigrants who are still inexperienced
 - Inattentive drivers
 - Impaired drivers
 - Drivers who speed
 - Bad drivers
 - Drivers who are unfamiliar with the area
 - Vehicles that have bald tires
- Right or wrong, alignment handles them all. Coupled with abuse, success is not always guaranteed.



Technical Standards Branch
Class B Bridge Inspection Course



Approach Road Section - Culverts


Approach Road / Embankment			
	Last	Now	Explanation of Condition
Horizontal Alignment			
Vertical Alignment			
Roadway Width (m)			
Embankment			
Sideslope (L:1)			
(Height of Cover (m) :)			
Guardrail (Y/N)			
Approach Road / Embankment General Rating			

Alignment


Approach Road / Embankment			
	Last	Now	Explanation of Condition
Horizontal Alignment			
Vertical Alignment			

- Separate rating to be provided for horizontal and vertical alignments
- Defects in alignment must be categorized in either the horizontal or vertical components
- Inspector should consider road alignments are used during adverse weather or road conditions – e.g. fog, heavy rain, snow, ungravelled surfaces, icy roads

Length of Approach

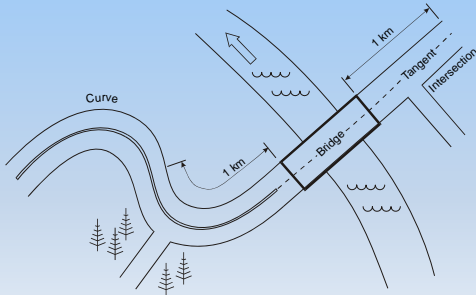

Length of Approach

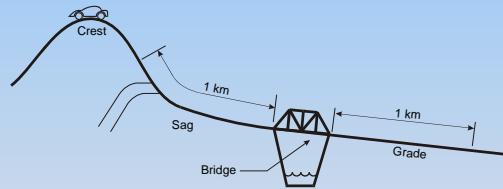

Alignment

- Design speed is the posted legal speed for road plus 10 kph
- Evaluate by driving at the legal speed limit - if safe to do so and if conditions permit.
- Observe sight distances
- Note if bridge is superelevated
- Note presence of speed limit or other signs
 - Sharp curve
 - Bus stop ahead
 - indicates sight distance problem
 - Intersection ahead
 - indicates sight distance problem

Horizontal Alignment Defects

- Horizontal defects result in a reduction in speed to drive the road safely. They include:
 - Reduced visibility – trees, buildings, embankments
 - Sharp corners
 - Intersecting roads
 - Bridge is at beginning of curve
 - Bridge is offset from straight alignment
 - Note if passing can still be done safely

Horizontal Alignment Ratings

- Note presence of intersecting roads and record location on form (Field accesses do not affect rating).
 - Rate 7 or less depending on visibility, traffic volume and traffic type.
 - Rate may be 8 or 9 if no intersections for 1km
- If horizontal defect is cause of reduced speed, then rate:
 - 6 or more if driven safely at legal speed limit
 - 5 if can be driven safely and posted not more than 20 km/hr below legal speed limit
 - 4 or less if posted more than 20 km/hr below the legal speed limit
 - 4 or less if sharp or blind curves
 - 5 if Land Access bridge and appropriate warning signs are in place.

Vertical Alignment Defects

- Vertical alignment defects result in a reduction in speed to drive the road safely. They include:
 - Reduced visibility – crests in road
 - Steep grades (take into consideration road surface e.g. loose gravel)
 - Adequate sight distance for stopping or passing
 - Intersecting roads

Vertical Alignment Rating

- Vertical alignment with a straight grade of 1% or less - rate 9
- If road can be driven safely at legal speed limit rate 6 or more
- If road can be safely driven and posted not more than 20 km/hr below legal rate 5
- Rate 4 or less if:
 - posted more than 20 km/hr below posted speed
 - sight distance is less than required
 - Steep grades, blind crest curves
- Rate 2 if combined effect of horizontal and vertical alignment is hazardous (e.g. very steep hill combined with sharp hair-pin curve)
- Rate 5 if Land Access bridge

Alignment


- For land access structures:
 - Road services land only, not residential access
 - Local road standards do not apply
 - Consider suitability for traffic
- If adequate for intended use and appropriate warning signs are in place, the Horizontal and Vertical alignment ratings can be rated 5

Roadway Width

Approach Road / Embankment			
	Last	Now	Explanation of Condition
Horizontal Alignment			
Vertical Alignment			
Roadway Width (m)			

- This is the width of the traveled lanes and shoulders
- Do not include median width if present
- If curbs on the approach road, measure between faces
- Measure at a representative cross-section
- Record to the nearest 0.1m
- Provide explanation if different on each side of structure

Roadway Width

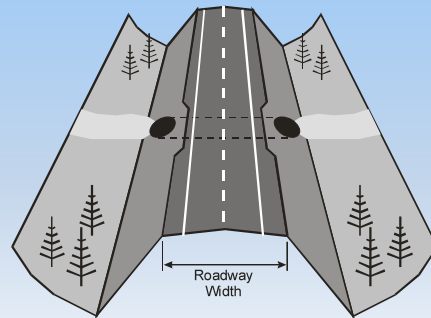

Approach Bump

Approach Road			
	Last	Now	Explanation of Condition
Horizontal Alignment			
Vertical Alignment			
Roadway Width (m)			
Approach Bump			

- Bridges only
- Refers to the smoothness of the transition onto the structure
- Severe bump
 - Can be hazard to traffic
 - Increases impact on structure

Approach Bump

- May be a symptom of
 - Settlement of the approach fill
 - Instability of the fill (slumping)
 - Undermining of fill by water
 - Settlement of or damage to approach slab
- Drive over at legal speed if safe – or at safest speed that conditions allow
- Observe traffic crossing structure
- If no defects and smooth transition rate 9
- If bump is noticeable but tolerable - rate 5
- If speed must be reduced - rate 4 or less
- If hazardous to traffic - rate 2 or less

Guardrail

Approach Road			
	Last	Now	Explanation of Condition
Horizontal Alignment			
Vertical Alignment			
Roadway Width (m)			
Approach Bump			
Guardrail (Y/N)			
Guardrail			
Length (m)			
Current Standard (Y/N)			
Termination Type			

- Refers to the guardrail or other traffic barrier along the edges of the approach road
- Purpose:
 - Prevent traffic from leaving the roadway at the structure
 - Prevent traffic from impacting structure

Guardrail - Culverts

- Rating is not required
- Record the presence of guardrail by **Yes** or **No**
- Provide comment if guardrail is on one shoulder only
- Guardrail that is too short or is otherwise ineffective – provide comment and maintenance recommendation
- Provide comment and maintenance recommendation if missing and is required for safety
- Note defects (e.g. - broken posts, damaged rails) and provide comment and maintenance recommendation

Guardrails - Bridges

- Record the presence of guardrail by **Yes** or **No**
- Record the minimum length to the nearest meter
 - Explain if different lengths exist
- Maximum is 99 m
- Record the type of termination
 - Common type is Turned Down, wing, Attenuator
- Based on current Standard Drawings record if the guardrail meets current standards (Yes/No)
 - Explain if No
 - Acceptable explanation is “Not thriebeam”
- Link to current Standard Drawings:
- <http://www.transportation.alberta.ca/4855.htm>

Guardrails - Bridges

- Inspect up to 45m from bridge
- Inspect all components of guardrail
 - Posts
 - Rail
 - Connections
 - Splices
 - Termination
- Rate according to condition only - not standard
- Minor damage but still functional – rate 5
- Missing bolts or improper laps - 4 or less
- Damaged - requires replacement – rate 3 or less
- Damaged – potential hazard – rate 2 or less
- Rate “X” if no guardrail exists
 - If required, recommend action and explain



Approach Road - Evaluation and Rating



Technical Standards Branch
Class B Bridge Inspection Course



Approach Road - Evaluation and Rating



Technical Standards Branch
Class B Bridge Inspection Course



Approach Road - Evaluation and Rating



Technical Standards Branch
Class B Bridge Inspection Course



Approach Road - Evaluation and Rating

Drainage

- Applies to bridges only
- Refers to the ability of the approaches to handle drainage
 - Must not allow water to drain onto structure
 - Must not allow damage to fills or headslopes
 - Must not pond on approaches
- Includes drain troughs on approaches
- Water may originate from
 - Precipitation onto approaches
 - Runoff from roadway
 - Runoff from structure



Technical Standards Branch
Class B Bridge Inspection Course



Drainage

- Look for:
 - Ponding of water on approaches or ends of structure
 - Erosion of fills, sideslope or ditches
 - Voids under approach slabs or abutments
 - Undermining of drain troughs
 - Damage or deterioration of drain troughs

Drainage

- Good drainage away from bridge – rate 5 or more
- Drainage onto bridge gutters - rate 4 or less
- Drainage onto bridge driving lanes - rate 3 or less
- Drainage eroding headslope or sideslope – rate 4 or less
- Erosion from approach road ditch drainage – rate 4 or less
- Drainage causing a hazard - rate 2 or less (e.g. ponding or icing into travel lanes)




Embankment

Approach Road / Embankment			
	Last	Now	Explanation of Condition
Horizontal Alignment			
Vertical Alignment			
Roadway Width (m)			
Embankment			
Sideslope (.:1)			

- Applies to culverts only
- Rates the stability of the road embankment at the culvert and the effects on:
 - traffic
 - structural and functional integrity of the culvert
- Evaluates:
 - roadway surface
 - sideslopes
 - transitions at ends of culvert

Embankment

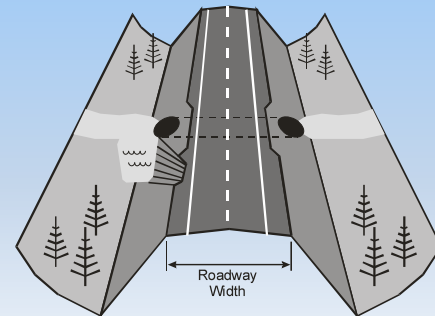

Embankment


Refers to Culvert Approach Roads

- Look for:
 - cracks or other evidence of instability
 - signs of erosion such as gullying on sideslopes
 - scour at toes of sideslopes or end transitions
- Embankments with no instability or scour/erosion - rate 9
- Embankments with erosion problems - rate 4 or less
- Unstable embankments causing damage to the culvert - rate 3 or less
- Unstable embankments affecting roadway - rate 3 or less

Sideslopes

- Estimate or measure the slope of the sideslope (h:v)
- Record steeper of upstream or downstream sideslope
- If berms or different slopes on the same side, record steepest slope
 - Do not record average slope
- Explain if sideslopes are irregular
 - varying slopes
 - benches or berms
 - different slopes on each sideslope

Sideslopes

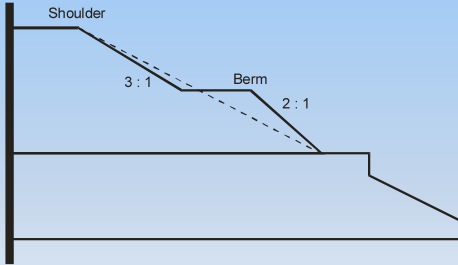


Height of Cover

	Approach Road / Embankment		Explanation of Condition
	Last	Now	
Horizontal Alignment			
Vertical Alignment			
Roadway Width (m)			
Embankment			
Sideslope (: 1)			
(Height of Cover) (m) :)			
Guardrail (Y/N)			
Approach Road / Embankment General Rating			

- The vertical distance between the centreline roadway surface and the crown of the culvert
- If different - measure at both ends and record average
- Need to be accurate for low covers
 - Live load effects are greater
- Record to the nearest 0.1m

Height of Cover

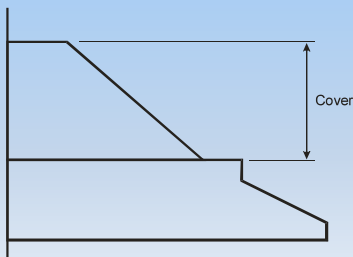

General Rating

Refer to 1.10. 1 and 6.8 (Bridges)
Refer to 1.10.6 and 13.4.6 (Culverts)

- Governing Elements
 - Horizontal alignment
 - Vertical alignment
 - Safety Concerns (severe approach bump)
 - Potential hazards (Drainage causing ponding/icing)
 - Embankment rating of 3 or less (Culverts)
 - Guardrail that is damaged resulting in a hazard (i.e.
- Missing approach rails that create a hazardous situation may govern the Gen. Rating (rate 2)

Questions??



Technical Standards Branch
Class B Bridge Inspection Course

